


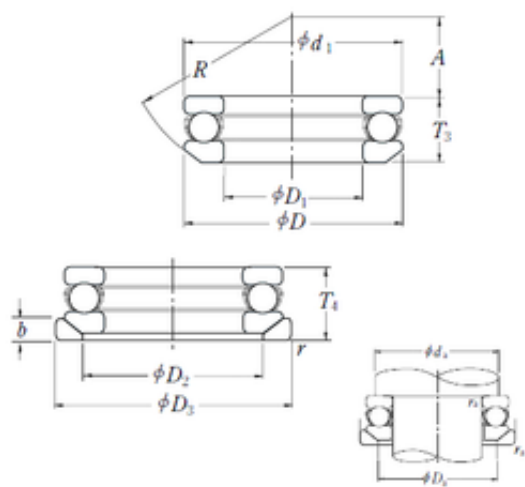

Bearing No. 53322XU

C	282
D	190 mm
R	140 mm
A	51 mm
T	72 mm
b	20,5 mm
d	110 mm
r	2
A_	51
D_	190
Z_	15
da	158
T3	67.2
C0	755
T4	72
ra	2
B_	72
R_	140
D2	150 mm
D3	195 mm
D1	113 mm
d1	187 mm
D_2	150
D_3	195
SRE	15.43
D_1	113
SRI	15.43
DA_	28.575
D_a	142
SREX	0.1

SRIN	0
SREN	0
mass	9.1
yobi	53322XU
SDM_	150
SRIX	0.1
KBRG	5131
r min.	2 mm
LangID	1
Weight	9,1 Kg
ra max.	2 mm
GRS rpm	900
Oil rpm	1300
da min.	158 mm
Da max.	142 mm
hidYobi	53322XU
hidTable	ecat_NSSDTB
Size (mm)	110x190x72
Prod_Type3	TB_SD_WASW
Width (mm)	72
Bearing number	53322XU
Bore Diameter (mm)	110
Outer Diameter (mm)	190
(Grease) Lubrication Speed	900 r/min
Basic static load rating (C0)	755 kN
Basic dynamic load rating (C)	282 kN