


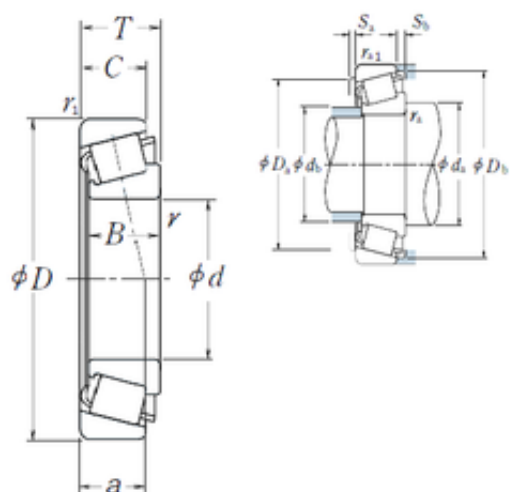

Bearing No. HR33205J

D	52 mm
d	25 mm
T	22 mm
B	22 mm
C	18 mm
a	14,1 mm
e	0.35
Cr	4850
Y0	0.94
db	29
da	34
Y1	1.7
B_	22
Sb	4
C0	56.5
Sa	4
D_	52
Z_	16
C_	18
C0r	5750
DA_	6.55
Iso	2DE
DE_	44.652
D_b	49.5
DI_	31.724
SBRG	32
SDM_	38.188
D_a2	43
KBRG	3111
yobi	HR33205J

D_a1	46
mass	0.221
TC-RA	106
r min.	1 mm
Weight	0,221 Kg
TC-DA1	7.09
TC-DA2	6.01
TC-SLR	16.2
Da min	43 mm
LangID	1
ALPHA_	13.167
Db min.	49,5 mm
Oil rpm	10000
db max.	29 mm
Da max.	46 mm
ra max.	1 mm
hidYobi	HR33205J
da min.	34 mm
T-ALP21	26
rb max.	1 mm
T-ALP22	20
T-ALP23	0
GRS rpm	7500
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	1
outer rb	1
TC-BET22	50

Size (mm)	25x52x22
Width (mm)	22
Prod_Type3	TRBSR_MD_A
Bearing number	HR33205J
Bore Diameter (mm)	25
Outer Diameter (mm)	52
Calculation factor (e)	0,35
Calculation factor (Y0)	0,94
(Oil) Lubrication Speed	10000 r/min
(Grease) Lubrication Speed	7500 r/min
Basic dynamic load rating (C)	47,5 kN
Basic static load rating (C0)	56,5 kN