


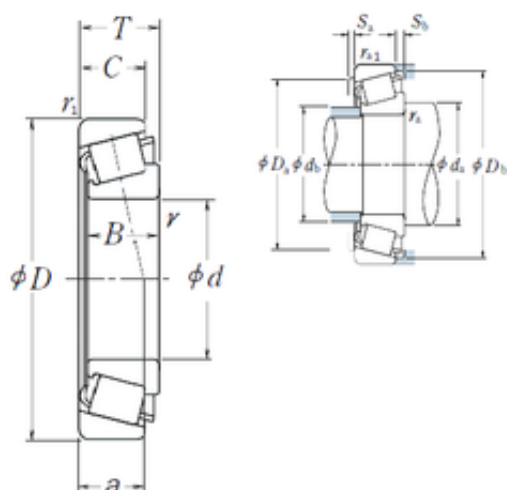

Bearing No. HR33214J

a	30,4 mm
e	0.41
d	70 mm
D	125 mm
T	41 mm
B	41 mm
C	32 mm
B_	41
da	82
Y0	0.81
C0	299
D_	125
Sb	9
Sa	7
db	78
Z_	20
Y1	1.5
C_	32
Cr	21300
DE_	110.999
Iso	3EE
DI_	83.177
C0r	30500
DA_	14.069
D_b	120
D_a2	107
SBRG	32
SDM_	97.088
D_a1	116
yobi	HR33214J

KBRG	3111
mass	2.15
TC-RA	225.533
r min.	2 mm
LangID	1
TC-DA2	13.053
Da min	107 mm
TC-SLR	30.5
ALPHA_	15.25
TC-DA1	15.085
Weight	2,15 Kg
T-ALP22	30
da min.	82 mm
r1 min.	1,5 mm
T-ALP21	30
db max.	78 mm
hidYobi	HR33214J
rb max.	1,5 mm
T-ALP23	0
Da max.	116 mm
Oil rpm	4000
GRS rpm	2800
ra max.	2 mm
inner r	2
Db min.	120 mm
outer r	1.5
inner ra	2
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Bearings
TC-BET23	0
TC-BET21	3

TC-BET22	50
Inventory	0.0
Size (mm)	70x125x41
Prod_Type3	TRBSR_MD_A
Width (mm)	41
Product Group	B04334
Bearing number	HR33214J
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	70
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Calculation factor (e)	0,41
(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,81
(Grease) Lubrication Speed	2800 r/min
Basic dynamic load rating (C)	209 kN
Basic static load rating (C0)	299 kN