


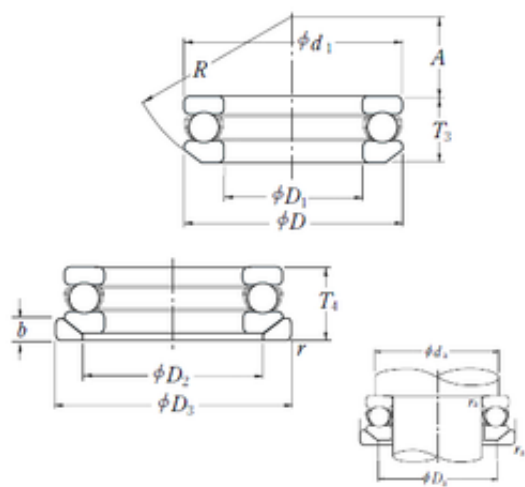

Bearing No. 53410U

C	147
D	110 mm
R	90 mm
A	35 mm
T	50 mm
b	14 mm
d	50 mm
r	1.5
A_	35
D_	110
Z_	11
da	86
T3	45.6
C0	288
T4	50
ra	1.5
B_	50
R_	90
D2	80 mm
D3	115 mm
D1	52 mm
d1	110 mm
D_2	80
D_3	115
SRE	11.15
D_1	52
SRI	11.15
DA_	20.638
D_a	74
SREX	0.08

SRIN	0
SREN	0
mass	2.41
yobi	53410U
SDM_	80
SRIX	0.08
KBRG	5131
r min.	1,5 mm
LangID	1
Weight	2,41 Kg
ra max.	1,5 mm
GRS rpm	1400
Oil rpm	2200
da min.	86 mm
Da max.	74 mm
hidYobi	53410U
hidTable	ecat_NSSDTB
Size (mm)	50x110x50
Prod_Type3	TB_SD_WASW
Width (mm)	50
Bearing number	53410U
Bore Diameter (mm)	50
Outer Diameter (mm)	110
(Grease) Lubrication Speed	1400 r/min
Basic static load rating (C0)	288 kN
Basic dynamic load rating (C)	147 kN