


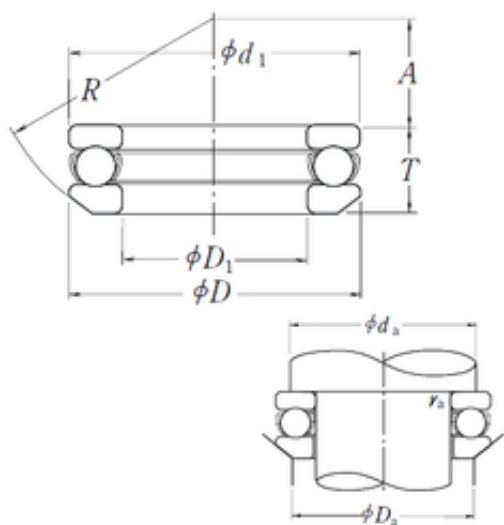

Bearing No. 53411

R	90 mm
C	181
r	1.5
d	55 mm
D	120 mm
T	50,5 mm
A	28 mm
R_	90
B_	50.5
ra	1.5
C0	350
da	94
Z_	10
A_	28
T3	50.5
d1	120 mm
D_	120
D1	57 mm
D_1	57
DA_	23.812
SRI	12.9
SRE	12.9
D_a	81
SREN	0
SRIN	0
yobi	53411
SRIX	0.08
mass	2.59
SDM_	87.5
KBRG	5121

SREX	0.08
Noun	Bearing
Weight	2,59 Kg
Bore 1	2.165 Inch 55 Millimeter
Banded	No
UNSPSC	31171552
r min.	1,5 mm
LangID	1
Bore 2	2.244 Inch 57 Millimeter
Height	1.988 Inch 50.5 Millimeter
GRS rpm	1300
hidYobi	53411
Oil rpm	1900
ra max.	1,5 mm
Da max.	81 mm
da min.	94 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	55x120x50.5
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	50,5
Weight / LBS	5.70997
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53411
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	55MM Bore 1; 57MM Bore 2; 120MM Outside Diameter; 50.5MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	4.724 Inch 120 Millimeter
Weight / Kilogram	3.1
Manufacturer Name	NSK
Bore Diameter (mm)	55
Outer Diameter (mm)	120
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	1300 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	350 kN
Basic dynamic load rating (C)	181 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter