


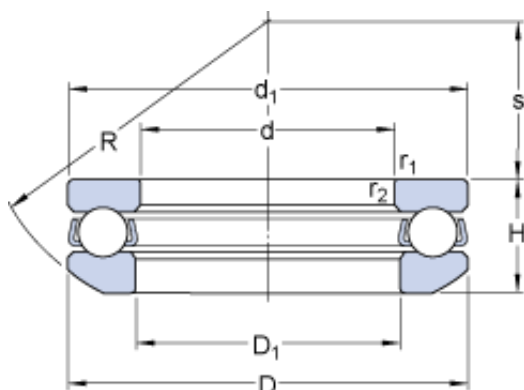

Bearing No. 53411 + U 411

S	28 mm
R	90 mm
d	55 mm
D	120 mm
H	50.5 mm
C	15.5 mm
Size (mm)	120x55x50.5
Width (mm)	50,5
D_1	57 mm
D_3	125 mm
H_1	55 mm
D_2	88 mm
d_1	120 mm
H_1	55 mm
D_3	125 mm
D_2	88 mm
Limiting speed	2400 r/min
Bearing number	53411 + U 411
Reference speed	1700 r/min
d_a min.	94 mm
D_a max.	88 mm
r_a max.	1.5 mm
Bore Diameter (mm)	120
Outer Diameter (mm)	55
r_a - max.	1.5 mm
D_a - max.	88 mm
$r_{1,2}$ min.	1.5 mm
d_a - min.	94 mm
Minimum load factor A	0.79

d_1 ?	120 mm
D_1 ?	57 mm
$r_{1,2}$ - min.	1.5 mm
Minimum load factor - A	0.79
Basic dynamic load rating C	195 kN
Basic dynamic load rating - C	195 kN
Fatigue load limit P_u	14.6 kN
Fatigue load limit - P_u	14.6 kN
Basic static load rating C_0	400 kN
Basic static load rating - C_0	400 kN
Mass bearing (including seat washer where applicable)	3.08 kg