


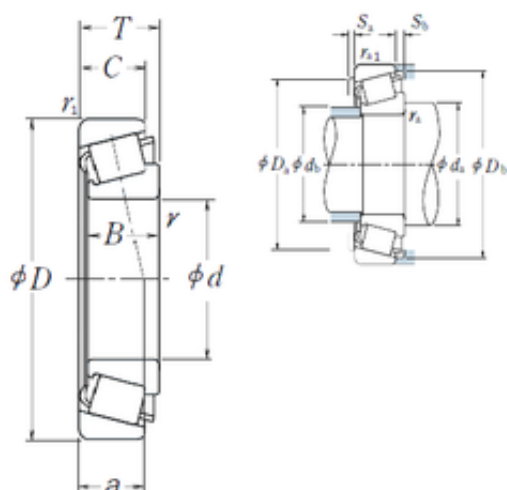

Bearing No. HR33016J

D	125 mm
d	80 mm
T	36 mm
B	36 mm
C	29,5 mm
a	25,5 mm
e	0.28
Cr	17500
Y0	1.2
db	88
da	91
Y1	2.2
B_	36
Sb	6.5
C0	282
Sa	6
D_	125
Z_	26
C_	29.5
C0r	28800
DA_	10.853
Iso	2CE
DE_	113.218
D_b	119
DI_	91.844
SBRG	30
SDM_	102.531
D_a2	112
KBRG	3111
yobi	HR33016J

D_a1	116
mass	1.66
TC-RA	324.397
r min.	1,5 mm
Weight	1,66 Kg
TC-DA1	11.323
TC-DA2	10.382
TC-SLR	27
Da min	112 mm
LangID	1
ALPHA_	10.5
Db min.	119 mm
Oil rpm	3600
db max.	88 mm
Da max.	116 mm
ra max.	1,5 mm
hidYobi	HR33016J
da min.	91 mm
T-ALP21	21
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	2800
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	80x125x36
Width (mm)	36
Prod_Type3	TRBSR_MD_A
Bearing number	HR33016J
Bore Diameter (mm)	80
Outer Diameter (mm)	125
Calculation factor (e)	0,28
Calculation factor (Y0)	1,2
(Oil) Lubrication Speed	3600 r/min
(Grease) Lubrication Speed	2800 r/min
Basic dynamic load rating (C)	172 kN
Basic static load rating (C0)	282 kN