


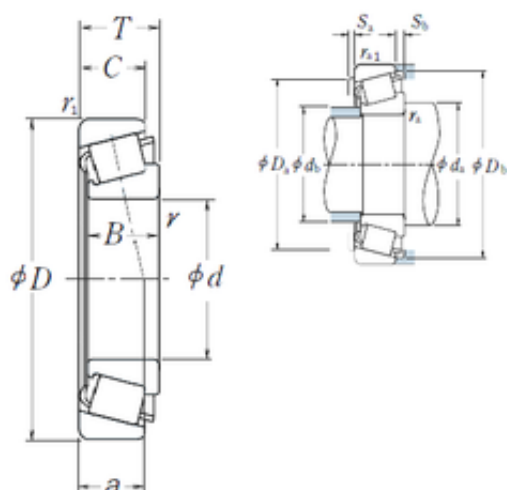

Bearing No. HR33017J

D	130 mm
d	85 mm
T	36 mm
B	36 mm
C	29,5 mm
a	26,5 mm
e	0.29
Cr	18400
Y0	1.1
db	94
da	96
Y1	2.1
B_	36
Sb	6.5
C0	305
Sa	6
D_	130
Z_	28
C_	29.5
C0r	31000
DA_	10.853
Iso	2CE
DE_	118.572
D_b	125
DI_	97.218
SBRG	30
SDM_	107.895
D_a2	117
KBRG	3111
yobi	HR33017J

D_a1	121
mass	1.75
TC-RA	324.397
r min.	1,5 mm
Weight	1,75 Kg
TC-DA1	11.323
TC-DA2	10.382
TC-SLR	27
Da min	117 mm
LangID	1
ALPHA_	11
Db min.	125 mm
Oil rpm	3600
db max.	94 mm
Da max.	121 mm
ra max.	1,5 mm
hidYobi	HR33017J
da min.	96 mm
T-ALP21	22
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	2600
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	85x130x36
Width (mm)	36
Prod_Type3	TRBSR_MD_A
Bearing number	HR33017J
Bore Diameter (mm)	85
Outer Diameter (mm)	130
Calculation factor (e)	0,29
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	3600 r/min
(Grease) Lubrication Speed	2600 r/min
Basic dynamic load rating (C)	180 kN
Basic static load rating (C0)	305 kN