


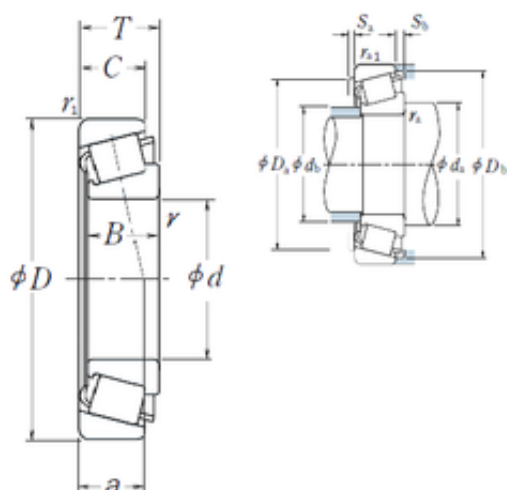

Bearing No. HR33018J

D	140 mm
d	90 mm
T	39 mm
B	39 mm
C	32,5 mm
a	27,9 mm
e	0.27
Cr	22400
Y0	1.2
db	99
da	102
Y1	2.2
B_	39
Sb	6.5
C0	360
Sa	7
D_	140
Z_	26
C_	32.5
C0r	37000
DA_	12.68
Iso	2CE
DE_	128.191
D_b	135
DI_	103.157
SBRG	30
SDM_	115.674
D_a2	129
KBRG	3111
yobi	HR33018J

D_a1	131
mass	2.21
TC-RA	378
r min.	2 mm
Weight	2,21 Kg
TC-DA1	13.194
TC-DA2	12.166
TC-SLR	29.5
Da min	129 mm
LangID	1
ALPHA_	10.167
Db min.	135 mm
Oil rpm	3200
db max.	99 mm
Da max.	131 mm
ra max.	2 mm
hidYobi	HR33018J
da min.	102 mm
T-ALP21	20
rb max.	1,5 mm
T-ALP22	20
T-ALP23	0
GRS rpm	2400
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2
outer rb	1.5
TC-BET22	0

Size (mm)	90x140x39
Width (mm)	39
Prod_Type3	TRBSR_MD_A
Bearing number	HR33018J
Bore Diameter (mm)	90
Outer Diameter (mm)	140
Calculation factor (e)	0,27
Calculation factor (Y0)	1,2
(Oil) Lubrication Speed	3200 r/min
(Grease) Lubrication Speed	2400 r/min
Basic dynamic load rating (C)	220 kN
Basic static load rating (C0)	360 kN