


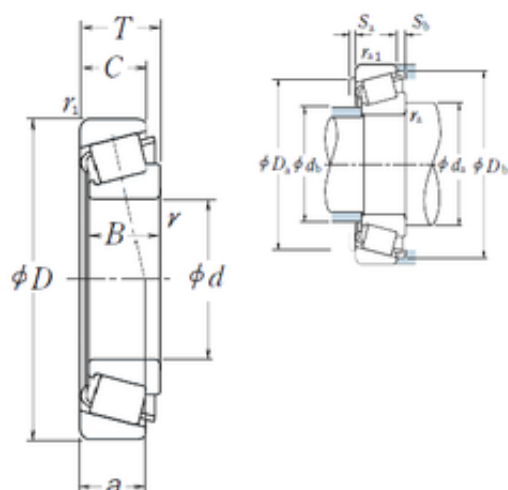

Bearing No. HR33020J

D	150 mm
d	100 mm
T	39 mm
B	39 mm
C	32,5 mm
a	29,3 mm
e	0.29
Cr	24000
Y0	1.2
db	107
da	112
Y1	2.1
B_	39
Sb	6.5
C0	405
Sa	7
D_	150
Z_	29
C_	32.5
C0r	41500
DA_	12.68
Iso	2CE
DE_	136.543
D_b	143
DI_	111.512
SBRG	30
SDM_	124.028
D_a2	137
KBRG	3111
yobi	HR33020J

D_a1	141
mass	2.38
TC-RA	378
r min.	2 mm
Weight	2,38 Kg
TC-DA1	13.194
TC-DA2	12.166
TC-SLR	29.5
Da min	137 mm
LangID	1
ALPHA_	10.833
Db min.	143 mm
Oil rpm	3000
db max.	107 mm
Da max.	141 mm
ra max.	2 mm
hidYobi	HR33020J
da min.	112 mm
T-ALP21	21
rb max.	1,5 mm
T-ALP22	40
T-ALP23	0
GRS rpm	2200
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2
outer rb	1.5
TC-BET22	0

Size (mm)	100x150x39
Width (mm)	39
Prod_Type3	TRBSR_MD_A
Bearing number	HR33020J
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Calculation factor (e)	0,29
Calculation factor (Y0)	1,2
(Oil) Lubrication Speed	3000 r/min
(Grease) Lubrication Speed	2200 r/min
Basic dynamic load rating (C)	235 kN
Basic static load rating (C0)	405 kN