


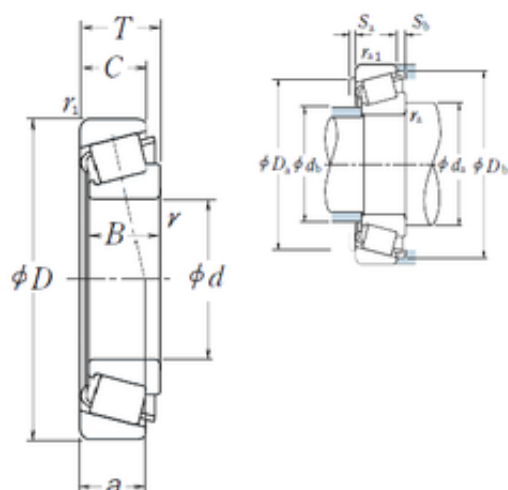

Bearing No. HR33021J

D	160 mm
d	105 mm
T	43 mm
B	43 mm
C	34 mm
a	30,9 mm
e	0.28
Cr	26100
Y0	1.2
db	115
da	120
Y1	2.1
B_	43
Sb	9
C0	435
Sa	7
D_	160
Z_	27
C_	34
C0r	44000
DA_	13.745
Iso	2DE
DE_	145.708
D_b	153
DI_	118.614
SBRG	30
SDM_	132.161
D_a2	146
KBRG	3111
yobi	HR33021J

D_a1	150
mass	3.03
TC-RA	409.5
r min.	2,5 mm
Weight	3,03 Kg
TC-DA1	14.293
TC-DA2	13.196
TC-SLR	31.5
Da min	146 mm
LangID	1
ALPHA_	10.667
Db min.	153 mm
Oil rpm	2800
db max.	115 mm
Da max.	150 mm
ra max.	2 mm
hidYobi	HR33021J
da min.	120 mm
T-ALP21	21
rb max.	2 mm
T-ALP22	20
T-ALP23	0
GRS rpm	2000
inner r	2.5
outer r	2
r1 min.	2 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2
outer rb	2
TC-BET22	0

Size (mm)	105x160x43
Width (mm)	43
Prod_Type3	TRBSR_MD_A
Bearing number	HR33021J
Bore Diameter (mm)	105
Outer Diameter (mm)	160
Calculation factor (e)	0,28
Calculation factor (Y0)	1,2
(Oil) Lubrication Speed	2800 r/min
(Grease) Lubrication Speed	2000 r/min
Basic dynamic load rating (C)	256 kN
Basic static load rating (C0)	435 kN