


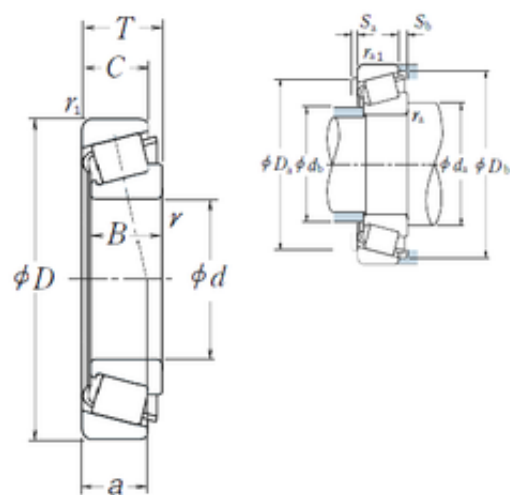

Bearing No. HR33026J

D	200 mm
d	130 mm
T	55 mm
B	55 mm
C	43 mm
a	42,4 mm
e	0.34
Cr	40500
Y0	0.97
db	144
da	145
Y1	1.8
B_	55
Sb	12
C0	715
Sa	8
D_	200
Z_	28
C_	43
C0r	73000
DA_	16.677
Iso	2EE
DE_	181.813
D_b	192
DI_	149.126
SBRG	30
SDM_	165.47
D_a2	179
KBRG	3111
yobi	HR33026J

D_a1	188
mass	6.25
TC-RA	429.994
r min.	2,5 mm
Weight	6,25 Kg
TC-DA1	17.51
TC-DA2	15.844
TC-SLR	41
Da min	179 mm
LangID	1
ALPHA_	12.833
Db min.	192 mm
Oil rpm	2200
db max.	144 mm
Da max.	188 mm
ra max.	2 mm
hidYobi	HR33026J
da min.	145 mm
T-ALP21	25
rb max.	2 mm
T-ALP22	40
T-ALP23	0
GRS rpm	1700
inner r	2.5
outer r	2
r1 min.	2 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2
outer rb	2
TC-BET22	20

Size (mm)	130x200x55
Width (mm)	55
Prod_Type3	TRBSR_MD_A
Bearing number	HR33026J
Bore Diameter (mm)	130
Outer Diameter (mm)	200
Calculation factor (e)	0,34
Calculation factor (Y0)	0,97
(Oil) Lubrication Speed	2200 r/min
(Grease) Lubrication Speed	1700 r/min
Basic dynamic load rating (C)	395 kN
Basic static load rating (C0)	715 kN