


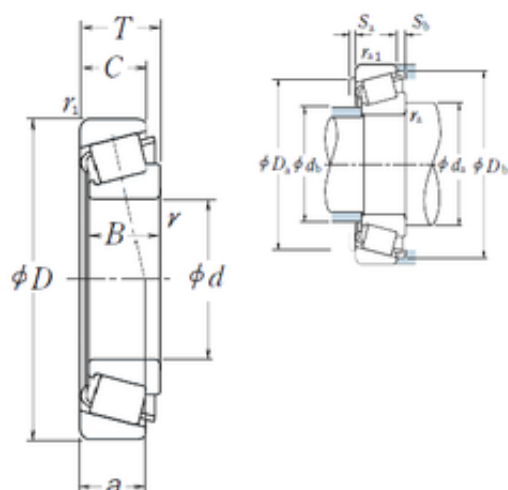

Bearing No. HR33028J

D	210 mm
d	140 mm
T	56 mm
B	56 mm
C	44 mm
a	45,5 mm
e	0.36
Cr	42000
Y0	0.92
db	153
da	155
Y1	1.7
B_	56
Sb	12
C0	770
Sa	7
D_	210
Z_	30
C_	44
C0r	78500
DA_	16.677
Iso	2DE
DE_	190.917
D_b	202
DI_	158.478
SBRG	30
SDM_	174.698
D_a2	189
KBRG	3111
yobi	HR33028J

D_a1	198
mass	6.74
TC-RA	429.994
r min.	2,5 mm
Weight	6,74 Kg
TC-DA1	17.51
TC-DA2	15.844
TC-SLR	41
Da min	189 mm
LangID	1
ALPHA_	13.5
Db min.	202 mm
Oil rpm	2200
db max.	153 mm
Da max.	198 mm
ra max.	2 mm
hidYobi	HR33028J
da min.	155 mm
T-ALP21	27
rb max.	2 mm
T-ALP22	0
T-ALP23	0
GRS rpm	1600
inner r	2.5
outer r	2
r1 min.	2 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2
outer rb	2
TC-BET22	20

Size (mm)	140x210x56
Width (mm)	56
Prod_Type3	TRBSR_MD_A
Bearing number	HR33028J
Bore Diameter (mm)	140
Outer Diameter (mm)	210
Calculation factor (e)	0,36
Calculation factor (Y0)	0,92
(Oil) Lubrication Speed	2200 r/min
(Grease) Lubrication Speed	1600 r/min
Basic dynamic load rating (C)	410 kN
Basic static load rating (C0)	770 kN