


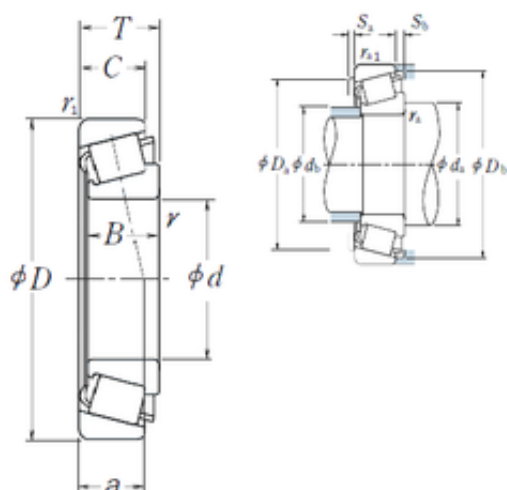

Bearing No. HR33030J

D	225 mm
d	150 mm
T	59 mm
B	59 mm
C	46 mm
a	48,7 mm
e	0.36
Cr	44000
Y0	0.9
db	165
da	168
Y1	1.7
B_	59
Sb	13
C0	805
Sa	8
D_	225
Z_	29
C_	46
C0r	82000
DA_	17.736
Iso	2EE
DE_	205.445
D_b	217
DI_	171.03
SBRG	30
SDM_	188.238
D_a2	203
KBRG	3111
yobi	HR33030J

D_a1	213
mass	8.07
TC-RA	456.491
r min.	3 mm
Weight	8,07 Kg
TC-DA1	18.589
TC-DA2	16.882
TC-SLR	42
Da min	203 mm
LangID	1
ALPHA_	13.667
Db min.	217 mm
Oil rpm	2000
db max.	165 mm
Da max.	213 mm
ra max.	2,5 mm
hidYobi	HR33030J
da min.	168 mm
T-ALP21	27
rb max.	2 mm
T-ALP22	20
T-ALP23	0
GRS rpm	1400
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2.5
outer rb	2
TC-BET22	20

Size (mm)	150x225x59
Width (mm)	59
Prod_Type3	TRBSR_MD_A
Bearing number	HR33030J
Bore Diameter (mm)	150
Outer Diameter (mm)	225
Calculation factor (e)	0,36
Calculation factor (Y0)	0,9
(Oil) Lubrication Speed	2000 r/min
(Grease) Lubrication Speed	1400 r/min
Basic dynamic load rating (C)	435 kN
Basic static load rating (C0)	805 kN