


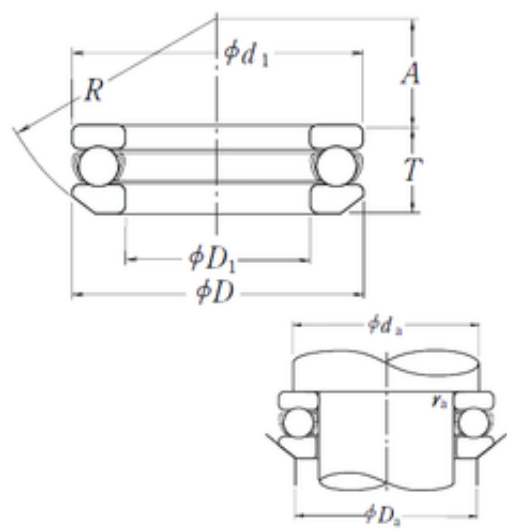

Bearing No. 53324X

C	330
r	2.1
d	120 mm
D	210 mm
T	74,1 mm
A	63 mm
R	160 mm
D_	210
T3	74.1
A_	63
Z_	15
da	173
C0	930
ra	2
B_	74.1
R_	160
D1	123 mm
d1	205 mm
D_a	157
SRI	17.15
DA_	31.75
D_1	123
SRE	17.15
SRIX	0.125
KBRG	5121
SDM_	165
yobi	53324X
SREX	0.125
SREN	0
mass	10.1

SRIN	0
r min.	2,1 mm
Weight	10,1 Kg
LangID	1
ra max.	2 mm
GRS rpm	800
Oil rpm	1200
Da max.	157 mm
da min.	173 mm
hidYobi	53324X
hidTable	ecat_NSSDTB
Size (mm)	120x210x74.1
Width (mm)	74,1
Prod_Type3	TB_SD_WAS
Bearing number	53324X
Bore Diameter (mm)	120
Outer Diameter (mm)	210
(Grease) Lubrication Speed	800 r/min
Basic static load rating (C0)	930 kN
Basic dynamic load rating (C)	330 kN