


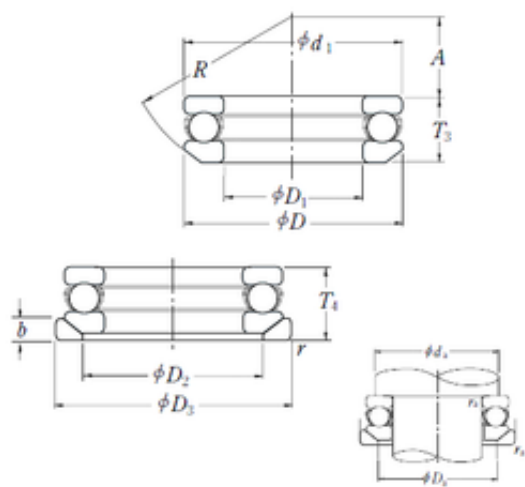

Bearing No. 53324XU

C	330
D	210 mm
R	160 mm
A	63 mm
T	80 mm
b	22 mm
d	120 mm
r	2.1
A_	63
D_	210
Z_	15
da	173
T3	74.1
C0	930
T4	80
ra	2
B_	80
R_	160
D2	165 mm
D3	220 mm
D1	123 mm
d1	205 mm
D_2	165
D_3	220
SRE	17.15
D_1	123
SRI	17.15
DA_	31.75
D_a	157
SREX	0.125

SRIN	0
SREN	0
mass	12.4
yobi	53324XU
SDM_	165
SRIX	0.125
KBRG	5131
r min.	2,1 mm
LangID	1
Weight	12,4 Kg
ra max.	2 mm
GRS rpm	800
Oil rpm	1200
da min.	173 mm
Da max.	157 mm
hidYobi	53324XU
hidTable	ecat_NSSDTB
Size (mm)	120x210x80
Prod_Type3	TB_SD_WASW
Width (mm)	80
Bearing number	53324XU
Bore Diameter (mm)	120
Outer Diameter (mm)	210
(Grease) Lubrication Speed	800 r/min
Basic static load rating (C0)	930 kN
Basic dynamic load rating (C)	330 kN