


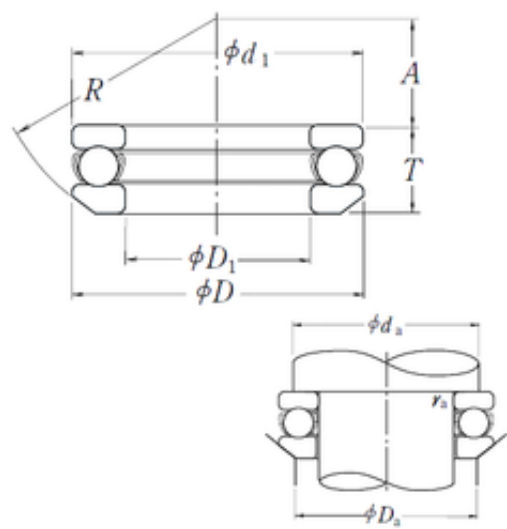

Bearing No. 53326X

C	350
r	2.1
d	130 mm
D	225 mm
T	80,3 mm
A	53 mm
R	160 mm
D_	225
T3	80.3
A_	53
Z_	15
da	186
C0	1030
ra	2
B_	80.3
R_	160
D1	134 mm
d1	220 mm
D_a	169
SRI	18
DA_	33.338
D_1	134
SRE	18
SRIX	0.125
KBRG	5121
SDM_	177.5
yobi	53326X
SREX	0.125
SREN	0
mass	12.7

SRIN	0
r min.	2,1 mm
Weight	12,7 Kg
LangID	1
ra max.	2 mm
GRS rpm	750
Oil rpm	1100
Da max.	169 mm
da min.	186 mm
hidYobi	53326X
hidTable	ecat_NSSDTB
Size (mm)	130x225x80.3
Width (mm)	80,3
Prod_Type3	TB_SD_WAS
Bearing number	53326X
Bore Diameter (mm)	130
Outer Diameter (mm)	225
(Grease) Lubrication Speed	750 r/min
Basic static load rating (C0)	1030 kN
Basic dynamic load rating (C)	350 kN