


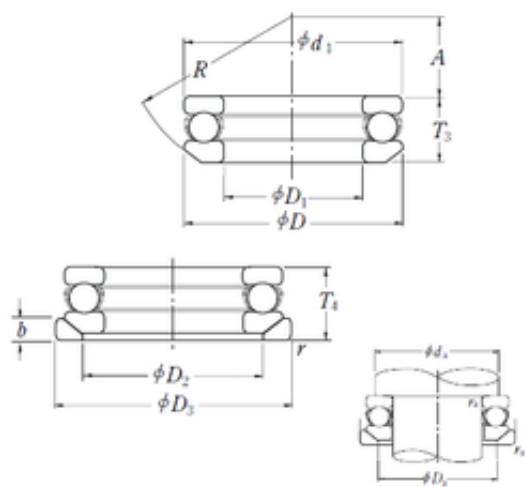

Bearing No. 53326XU

C	350
D	225 mm
R	160 mm
A	53 mm
T	86 mm
b	26 mm
d	130 mm
r	2.1
A_	53
D_	225
Z_	15
da	186
T3	80.3
C0	1030
T4	86
ra	2
B_	86
R_	160
D2	177 mm
D3	235 mm
D1	134 mm
d1	220 mm
D_2	177
D_3	235
SRE	18
D_1	134
SRI	18
DA_	33.338
D_a	169
SREX	0.125

SRIN	0
SREN	0
mass	15.8
yobi	53326XU
SDM_	177.5
SRIX	0.125
KBRG	5131
r min.	2,1 mm
LangID	1
Weight	15,8 Kg
ra max.	2 mm
GRS rpm	750
Oil rpm	1100
da min.	186 mm
Da max.	169 mm
hidYobi	53326XU
hidTable	ecat_NSSDTB
Size (mm)	130x225x86
Prod_Type3	TB_SD_WASW
Width (mm)	86
Bearing number	53326XU
Bore Diameter (mm)	130
Outer Diameter (mm)	225
(Grease) Lubrication Speed	750 r/min
Basic static load rating (C0)	1030 kN
Basic dynamic load rating (C)	350 kN