


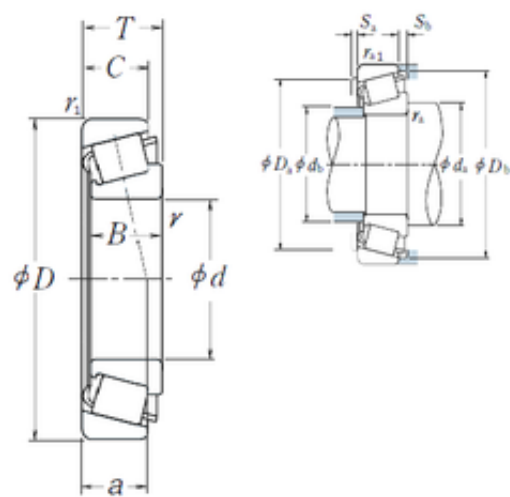

Bearing No. HR33005J

D	47 mm
d	25 mm
T	17 mm
B	17 mm
C	14 mm
a	11 mm
e	0.29
Cr	3150
Y0	1.1
db	29
da	33
Y1	2.1
B_	17
Sb	3
C0	38
Sa	3
D_	47
Z_	18
C_	14
C0r	3900
DA_	5.039
Iso	2CE
DE_	40.978
D_b	44
DI_	31.036
SBRG	30
SDM_	36.007
D_a2	41
KBRG	3111
yobi	HR33005J

D_a1	42
mass	0.131
TC-RA	114.358
r min.	0,6 mm
Weight	0,131 Kg
TC-DA1	5.322
TC-DA2	4.756
TC-SLR	12.2
Da min	41 mm
LangID	1
ALPHA_	10.917
Db min.	44 mm
Oil rpm	11000
db max.	29 mm
Da max.	42 mm
ra max.	0,6 mm
hidYobi	HR33005J
da min.	33 mm
T-ALP21	21
rb max.	0,6 mm
T-ALP22	50
T-ALP23	0
GRS rpm	8000
inner r	0.6
outer r	0.6
r1 min.	0,6 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	0.6
outer rb	0.6
TC-BET22	40

Size (mm)	25x47x17
Width (mm)	17
Prod_Type3	TRBSR_MD_A
Bearing number	HR33005J
Bore Diameter (mm)	25
Outer Diameter (mm)	47
Calculation factor (e)	0,29
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	11000 r/min
(Grease) Lubrication Speed	8000 r/min
Basic dynamic load rating (C)	31 kN
Basic static load rating (C0)	38 kN