


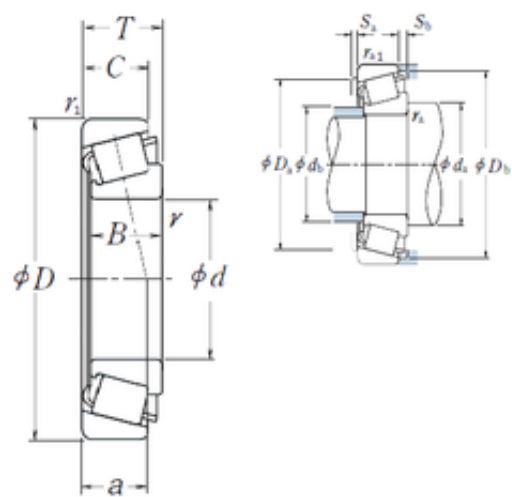

Bearing No. HR33006J

D	55 mm
d	30 mm
T	20 mm
B	20 mm
C	16 mm
a	13,1 mm
e	0.29
Cr	4250
Y0	1.1
db	35
da	39
Y1	2.1
B_	20
Sb	4
C0	54
Sa	3
D_	55
Z_	19
C_	16
C0r	5500
DA_	5.738
Iso	2CE
DE_	48.393
D_b	52
DI_	37.205
SBRG	30
SDM_	42.799
D_a2	48
KBRG	3111
yobi	HR33006J

D_a1	49
mass	0.208
TC-RA	134.394
r min.	1 mm
Weight	0,208 Kg
TC-DA1	6.059
TC-DA2	5.416
TC-SLR	14.3
Da min	48 mm
LangID	1
ALPHA_	11
Db min.	52 mm
Oil rpm	9000
db max.	35 mm
Da max.	49 mm
ra max.	1 mm
hidYobi	HR33006J
da min.	39 mm
T-ALP21	22
rb max.	1 mm
T-ALP22	0
T-ALP23	0
GRS rpm	6700
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1
outer rb	1
TC-BET22	35

Size (mm)	30x55x20
Width (mm)	20
Prod_Type3	TRBSR_MD_A
Bearing number	HR33006J
Bore Diameter (mm)	30
Outer Diameter (mm)	55
Calculation factor (e)	0,29
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	9000 r/min
(Grease) Lubrication Speed	6700 r/min
Basic dynamic load rating (C)	42 kN
Basic static load rating (C0)	54 kN