


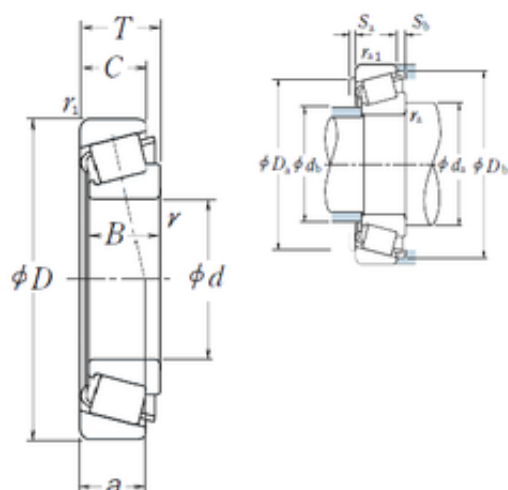

Bearing No. HR33007J

D	62 mm
d	35 mm
T	21 mm
B	21 mm
C	17 mm
a	14,1 mm
e	0.31
Cr	4950
Y0	1.1
db	40
da	44
Y1	2
B_	21
Sb	4
C0	65
Sa	4
D_	62
Z_	20
C_	17
C0r	6650
DA_	6.196
Iso	2CE
DE_	54.779
D_b	59
DI_	42.549
SBRG	30
SDM_	48.664
D_a2	55
KBRG	3111
yobi	HR33007J

D_a1	56
mass	0.267
TC-RA	144.908
r min.	1 mm
Weight	0,267 Kg
TC-DA1	6.533
TC-DA2	5.858
TC-SLR	15
Da min	55 mm
LangID	1
ALPHA_	11.5
Db min.	59 mm
Oil rpm	8000
db max.	40 mm
Da max.	56 mm
ra max.	1 mm
hidYobi	HR33007J
da min.	44 mm
T-ALP21	23
rb max.	1 mm
T-ALP22	0
T-ALP23	0
GRS rpm	5600
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1
outer rb	1
TC-BET22	35

Size (mm)	35x62x21
Width (mm)	21
Prod_Type3	TRBSR_MD_A
Bearing number	HR33007J
Bore Diameter (mm)	35
Outer Diameter (mm)	62
Calculation factor (e)	0,31
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	8000 r/min
(Grease) Lubrication Speed	5600 r/min
Basic dynamic load rating (C)	49 kN
Basic static load rating (C0)	65 kN