


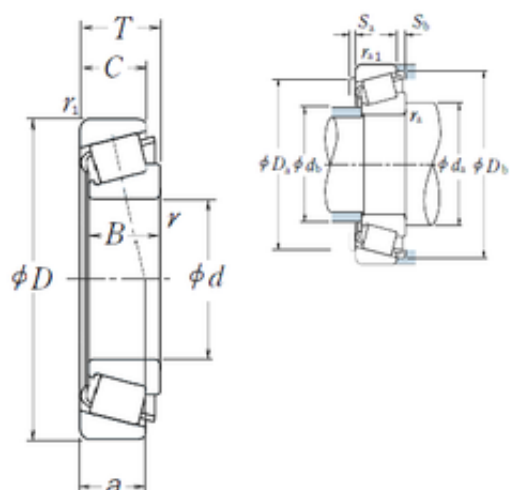

Bearing No. HR33008J

D	68 mm
d	40 mm
T	22 mm
B	22 mm
C	18 mm
a	14,6 mm
e	0.28
Cr	6000
Y0	1.2
db	45
da	49
Y1	2.1
B_	22
Sb	4
C0	81.5
Sa	4
D_	68
Z_	22
C_	18
C0r	8300
DA_	6.672
Iso	2BE
DE_	60.681
D_b	65
DI_	47.446
SBRG	30
SDM_	54.064
D_a2	61
KBRG	3111
yobi	HR33008J

D_a1	62
mass	0.322
TC-RA	171.678
r min.	1 mm
Weight	0,322 Kg
TC-DA1	6.991
TC-DA2	6.353
TC-SLR	15.7
Da min	61 mm
LangID	1
ALPHA_	10.667
Db min.	65 mm
Oil rpm	7100
db max.	45 mm
Da max.	62 mm
ra max.	1 mm
hidYobi	HR33008J
da min.	49 mm
T-ALP21	21
rb max.	1 mm
T-ALP22	20
T-ALP23	0
GRS rpm	5300
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1
outer rb	1
TC-BET22	20

Size (mm)	40x68x22
Width (mm)	22
Prod_Type3	TRBSR_MD_A
Bearing number	HR33008J
Bore Diameter (mm)	40
Outer Diameter (mm)	68
Calculation factor (e)	0,28
Calculation factor (Y0)	1,2
(Oil) Lubrication Speed	7100 r/min
(Grease) Lubrication Speed	5300 r/min
Basic dynamic load rating (C)	59 kN
Basic static load rating (C0)	81,5 kN