


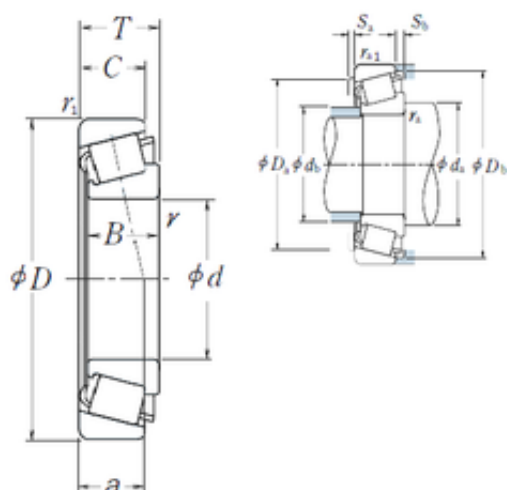

Bearing No. HR33012J

D	95 mm
d	60 mm
T	27 mm
B	27 mm
C	21 mm
a	20 mm
e	0.33
Cr	9800
Y0	1
db	66
da	71
Y1	1.8
B_	27
Sb	6
C0	150
Sa	5
D_	95
Z_	26
C_	21
C0r	15300
DA_	8.115
Iso	2CE
DE_	85.014
D_b	90
DI_	69.156
SBRG	30
SDM_	77.085
D_a2	85
KBRG	3111
yobi	HR33012J

D_a1	86
mass	0.713
TC-RA	209
r min.	1,5 mm
Weight	0,713 Kg
TC-DA1	8.511
TC-DA2	7.718
TC-SLR	19.5
Da min	85 mm
LangID	1
ALPHA_	12.333
Db min.	90 mm
Oil rpm	5000
db max.	66 mm
Da max.	86 mm
ra max.	1,5 mm
hidYobi	HR33012J
da min.	71 mm
T-ALP21	24
rb max.	1,5 mm
T-ALP22	40
T-ALP23	0
GRS rpm	3600
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1.5
outer rb	1.5
TC-BET22	20

Size (mm)	60x95x27
Width (mm)	27
Prod_Type3	TRBSR_MD_A
Bearing number	HR33012J
Bore Diameter (mm)	60
Outer Diameter (mm)	95
Calculation factor (e)	0,33
Calculation factor (Y0)	1
(Oil) Lubrication Speed	5000 r/min
(Grease) Lubrication Speed	3600 r/min
Basic dynamic load rating (C)	96 kN
Basic static load rating (C0)	150 kN