


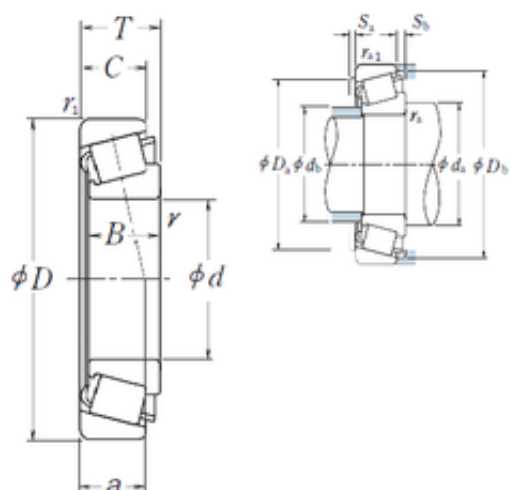

Bearing No. HR33014J

D	110 mm
d	70 mm
T	31 mm
B	31 mm
C	25,5 mm
a	22,2 mm
e	0.28
Cr	12900
Y0	1.2
db	78
da	81
Y1	2.1
B_	31
Sb	5.5
C0	204
Sa	5
D_	110
Z_	26
C_	25.5
C0r	20800
DA_	9.343
Iso	2CE
DE_	99.863
D_b	105
DI_	81.392
SBRG	30
SDM_	90.628
D_a2	100
KBRG	3111
yobi	HR33014J

D_a1	101
mass	1.11
TC-RA	278.987
r min.	1,5 mm
Weight	1,11 Kg
TC-DA1	9.738
TC-DA2	8.947
TC-SLR	22.7
Da min	100 mm
LangID	1
ALPHA_	10.75
Db min.	105 mm
Oil rpm	4300
db max.	78 mm
Da max.	101 mm
ra max.	1,5 mm
hidYobi	HR33014J
da min.	81 mm
T-ALP21	21
rb max.	1,5 mm
T-ALP22	30
T-ALP23	0
GRS rpm	3000
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	70x110x31
Width (mm)	31
Prod_Type3	TRBSR_MD_A
Bearing number	HR33014J
Bore Diameter (mm)	70
Outer Diameter (mm)	110
Calculation factor (e)	0,28
Calculation factor (Y0)	1,2
(Oil) Lubrication Speed	4300 r/min
(Grease) Lubrication Speed	3000 r/min
Basic dynamic load rating (C)	127 kN
Basic static load rating (C0)	204 kN