


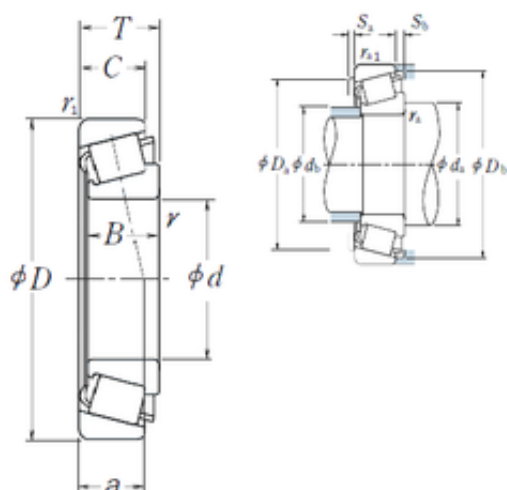

Bearing No. HR33015J

D	115 mm
d	75 mm
T	31 mm
B	31 mm
C	25,5 mm
a	23 mm
e	0.3
Cr	13500
Y0	1.1
db	83
da	86
Y1	2
B_	31
Sb	5.5
C0	220
Sa	6
D_	115
Z_	28
C_	25.5
C0r	22500
DA_	9.343
Iso	2CE
DE_	104.473
D_b	110
DI_	86.002
SBRG	30
SDM_	95.238
D_a2	104
KBRG	3111
yobi	HR33015J

D_a1	106
mass	1.18
TC-RA	278.987
r min.	1,5 mm
Weight	1,18 Kg
TC-DA1	9.738
TC-DA2	8.947
TC-SLR	22.7
Da min	104 mm
LangID	1
ALPHA_	11.25
Db min.	110 mm
Oil rpm	4000
db max.	83 mm
Da max.	106 mm
ra max.	1,5 mm
hidYobi	HR33015J
da min.	86 mm
T-ALP21	22
rb max.	1,5 mm
T-ALP22	30
T-ALP23	0
GRS rpm	3000
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	75x115x31
Width (mm)	31
Prod_Type3	TRBSR_MD_A
Bearing number	HR33015J
Bore Diameter (mm)	75
Outer Diameter (mm)	115
Calculation factor (e)	0,3
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	4000 r/min
(Grease) Lubrication Speed	3000 r/min
Basic dynamic load rating (C)	133 kN
Basic static load rating (C0)	220 kN