


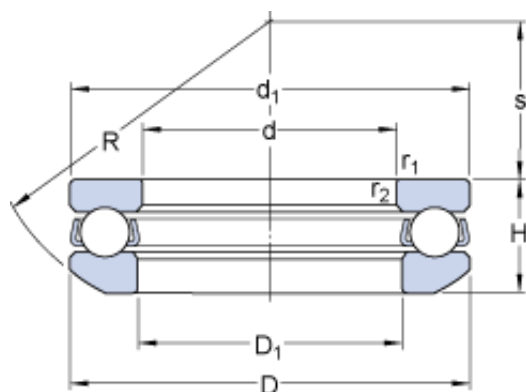

Bearing No. 53410 + U 410

s	35 mm
R	90 mm
d	50 mm
D	110 mm
H	45.6 mm
C	14 mm
Size (mm)	110x50x45.6
Width (mm)	45,6
D ₁	52 mm
D ₃	115 mm
H ₁	50 mm
D ₂	80 mm
d ₁	110 mm
H ₁	50 mm
D ₃	115 mm
D ₂	80 mm
Limiting speed	2600 r/min
Bearing number	53410 + U 410
Reference speed	1900 r/min
d _a min.	86 mm
D _a max.	80 mm
r _a max.	1.5 mm
Bore Diameter (mm)	110
Outer Diameter (mm)	50
r _a - max.	1.5 mm
D _a - max.	80 mm
r _{1,2} min.	1.5 mm
d _a - min.	86 mm
Minimum load factor A	0.6

d_1 ?	110 mm
D_1 ?	52 mm
$r_{1,2}$ - min.	1.5 mm
Minimum load factor - A	0.6
Basic dynamic load rating C	159 kN
Basic dynamic load rating - C	159 kN
Fatigue load limit P_u	12.5 kN
Fatigue load limit - P_u	12.5 kN
Basic static load rating C_0	340 kN
Basic static load rating - C_0	340 kN
Mass bearing (including seat washer where applicable)	2.31 kg