


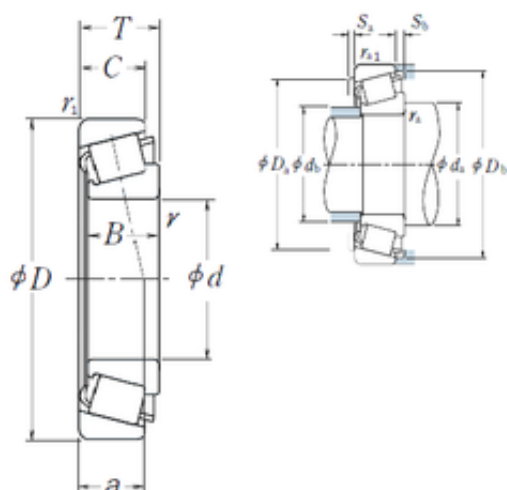

Bearing No. HR32320J

D	215 mm
d	100 mm
T	77,5 mm
B	73 mm
C	60 mm
a	53,2 mm
e	0.35
Cr	57500
Y0	0.96
db	125
da	125
Y1	1.7
B_	73
Sb	17.5
C0	755
Sa	5
D_	215
Z_	15
C_	60
C0r	77000
DA_	29.009
Iso	2GD
DE_	185.45
D_b	200
DI_	129.214
SBRG	23
SDM_	157.332
D_a2	178
KBRG	3111
yobi	HR32320J

D_a1	201
mass	12.7
TC-RA	441.5
r min.	4 mm
Weight	12,7 Kg
TC-DA1	30.814
TC-DA2	27.203
TC-SLR	52
Da min	178 mm
LangID	1
ALPHA_	12.953
Db min.	200 mm
Oil rpm	2400
db max.	125 mm
Da max.	201 mm
ra max.	3 mm
hidYobi	HR32320J
da min.	125 mm
T-ALP21	25
rb max.	2,5 mm
T-ALP22	54
T-ALP23	20
GRS rpm	1700
inner r	4
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	3
outer rb	2.5
TC-BET22	0

Size (mm)	100x215x77.5
Width (mm)	77,5
Prod_Type3	TRBSR_MD_A
Bearing number	HR32320J
Bore Diameter (mm)	100
Outer Diameter (mm)	215
Calculation factor (e)	0,35
Calculation factor (Y0)	0,96
(Oil) Lubrication Speed	2400 r/min
(Grease) Lubrication Speed	1700 r/min
Basic dynamic load rating (C)	565 kN
Basic static load rating (C0)	755 kN