


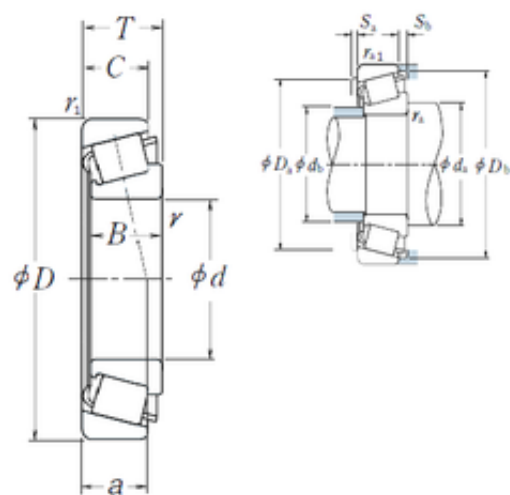

Bearing No. HR32322J

D	240 mm
d	110 mm
T	84,5 mm
B	80 mm
C	65 mm
a	58,5 mm
e	0.35
Cr	68500
Y0	0.96
db	139
da	135
Y1	1.7
B_	80
Sb	19.5
C0	910
Sa	6
D_	240
Z_	15
C_	65
C0r	93000
DA_	32.395
Iso	2GD
DE_	207.021
D_b	222
DI_	144.314
SBRG	23
SDM_	175.668
D_a2	201
KBRG	3111
yobi	HR32322J

D_a1	226
mass	17.1
TC-RA	492
r min.	4 mm
Weight	17,1 Kg
TC-DA1	34.339
TC-DA2	30.451
TC-SLR	56
Da min	201 mm
LangID	1
ALPHA_	12.953
Db min.	222 mm
Oil rpm	2000
db max.	139 mm
Da max.	226 mm
ra max.	3 mm
hidYobi	HR32322J
da min.	135 mm
T-ALP21	25
rb max.	2,5 mm
T-ALP22	54
T-ALP23	20
GRS rpm	1500
inner r	4
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	3
outer rb	2.5
TC-BET22	0

Size (mm)	110x240x84.5
Width (mm)	84,5
Prod_Type3	TRBSR_MD_A
Bearing number	HR32322J
Bore Diameter (mm)	110
Outer Diameter (mm)	240
Calculation factor (e)	0,35
Calculation factor (Y0)	0,96
(Oil) Lubrication Speed	2000 r/min
(Grease) Lubrication Speed	1500 r/min
Basic dynamic load rating (C)	675 kN
Basic static load rating (C0)	910 kN