


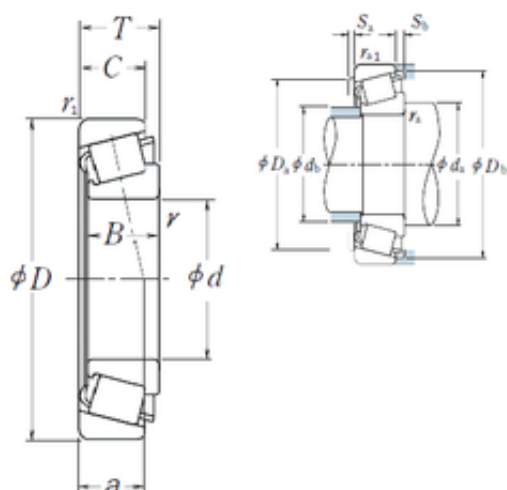

Bearing No. HR32907J

D	55 mm
d	35 mm
T	14 mm
B	14 mm
C	11,5 mm
a	10,7 mm
e	0.29
Cr	2790
Y0	1.1
db	40
da	43
Y1	2.1
B_	14
Sb	2.5
C0	39
Sa	3
D_	55
Z_	26
C_	11.5
C0r	3950
DA_	4.341
Iso	2BD
DE_	49.456
D_b	52.5
DI_	40.944
SBRG	29
SDM_	45.2
D_a2	50
KBRG	3111
yobi	HR32907J

D_a1	50
mass	0.123
TC-RA	134.616
r min.	0,6 mm
Weight	0,123 Kg
TC-DA1	4.503
TC-DA2	4.179
TC-SLR	9.7
Da min	50 mm
LangID	1
ALPHA_	11
Db min.	52,5 mm
Oil rpm	8500
db max.	40 mm
Da max.	50 mm
ra max.	0,6 mm
hidYobi	HR32907J
da min.	43 mm
T-ALP21	22
rb max.	0,6 mm
T-ALP22	0
T-ALP23	0
GRS rpm	6300
inner r	0.6
outer r	0.6
r1 min.	0,6 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	1
inner ra	0.6
outer rb	0.6
TC-BET22	55

Size (mm)	35x55x14
Width (mm)	14
Prod_Type3	TRBSR_MD_A
Bearing number	HR32907J
Bore Diameter (mm)	35
Outer Diameter (mm)	55
Calculation factor (e)	0,29
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	8500 r/min
(Grease) Lubrication Speed	6300 r/min
Basic dynamic load rating (C)	27,4 kN
Basic static load rating (C0)	39 kN