


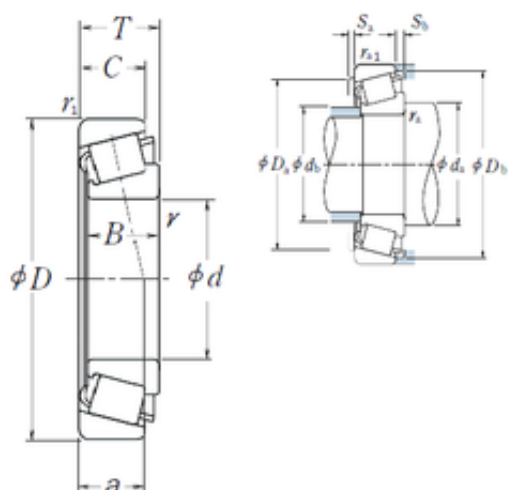

Bearing No. HR32917J

|      |          |
|------|----------|
| D    | 120 mm   |
| d    | 85 mm    |
| T    | 23 mm    |
| B    | 23 mm    |
| C    | 18 mm    |
| a    | 20,9 mm  |
| e    | 0.33     |
| Cr   | 9550     |
| Y0   | 1        |
| db   | 92       |
| da   | 96       |
| Y1   | 1.8      |
| B_   | 23       |
| Sb   | 5        |
| C0   | 157      |
| Sa   | 5        |
| D_   | 120      |
| Z_   | 32       |
| C_   | 18       |
| C0r  | 16000    |
| DA_  | 8.296    |
| Iso  | 2BC      |
| DE_  | 110.524  |
| D_b  | 115      |
| DI_  | 94.157   |
| SBRG | 29       |
| SDM_ | 102.341  |
| D_a2 | 111      |
| KBRG | 3111     |
| yobi | HR32917J |
|      |          |

|          |             |
|----------|-------------|
| D_a1     | 111         |
| mass     | 0.8         |
| TC-RA    | 267.26      |
| r min.   | 1,5 mm      |
| Weight   | 0,8 Kg      |
| TC-DA1   | 8.551       |
| TC-DA2   | 8.04        |
| TC-SLR   | 16          |
| Da min   | 111 mm      |
| LangID   | 1           |
| ALPHA_   | 12.3        |
| Db min.  | 115 mm      |
| Oil rpm  | 3800        |
| db max.  | 92 mm       |
| Da max.  | 111 mm      |
| ra max.  | 1,5 mm      |
| hidYobi  | HR32917J    |
| da min.  | 96 mm       |
| T-ALP21  | 24          |
| rb max.  | 1,5 mm      |
| T-ALP22  | 36          |
| T-ALP23  | 0           |
| GRS rpm  | 2800        |
| inner r  | 1.5         |
| outer r  | 1.5         |
| r1 min.  | 1,5 mm      |
| hidTable | ecat_NSTPRM |
| TC-BET23 | 0           |
| TC-BET21 | 1           |
| inner ra | 1.5         |
| outer rb | 1.5         |
| TC-BET22 | 50          |
|          |             |

|                               |            |
|-------------------------------|------------|
| Size (mm)                     | 85x120x23  |
| Width (mm)                    | 23         |
| Prod_Type3                    | TRBSR_MD_A |
| Bearing number                | HR32917J   |
| Bore Diameter (mm)            | 85         |
| Outer Diameter (mm)           | 120        |
| Calculation factor (e)        | 0,33       |
| Calculation factor (Y0)       | 1          |
| (Oil) Lubrication Speed       | 3800 r/min |
| (Grease) Lubrication Speed    | 2800 r/min |
| Basic dynamic load rating (C) | 93,5 kN    |
| Basic static load rating (C0) | 157 kN     |