


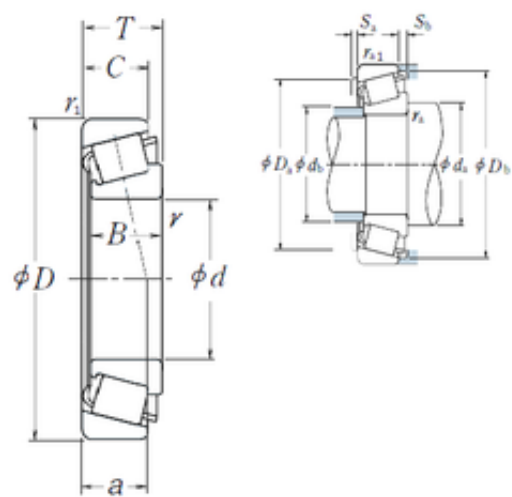

Bearing No. HR32926J

D	180 mm
d	130 mm
T	32 mm
B	32 mm
C	25 mm
a	31,4 mm
e	0.34
Cr	20400
Y0	0.97
db	140
da	142
Y1	1.8
B_	32
Sb	7
C0	365
Sa	6
D_	180
Z_	35
C_	25
C0r	37500
DA_	12.127
Iso	2CC
DE_	167.309
D_b	173
DI_	143.474
SBRG	29
SDM_	155.392
D_a2	168
KBRG	3111
yobi	HR32926J

D_a1	170
mass	2.46
TC-RA	390.5
r min.	2 mm
Weight	2,46 Kg
TC-DA1	12.494
TC-DA2	11.76
TC-SLR	23
Da min	168 mm
LangID	1
ALPHA_	12.75
Db min.	173 mm
Oil rpm	2400
db max.	140 mm
Da max.	170 mm
ra max.	2 mm
hidYobi	HR32926J
da min.	142 mm
T-ALP21	25
rb max.	1,5 mm
T-ALP22	30
T-ALP23	0
GRS rpm	1800
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	1
inner ra	2
outer rb	1.5
TC-BET22	50

Size (mm)	130x180x32
Width (mm)	32
Prod_Type3	TRBSR_MD_A
Bearing number	HR32926J
Bore Diameter (mm)	130
Outer Diameter (mm)	180
Calculation factor (e)	0,34
Calculation factor (Y0)	0,97
(Oil) Lubrication Speed	2400 r/min
(Grease) Lubrication Speed	1800 r/min
Basic dynamic load rating (C)	200 kN
Basic static load rating (C0)	365 kN