


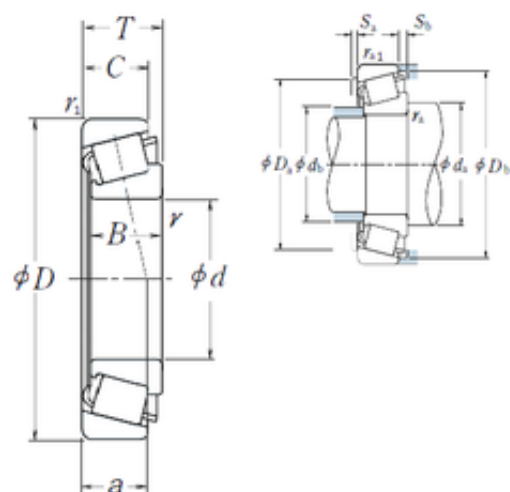

Bearing No. HR32928J

D	190 mm
d	140 mm
T	32 mm
B	32 mm
C	25 mm
a	33,6 mm
e	0.36
Cr	21000
Y0	0.92
db	150
da	152
Y1	1.7
B_	32
Sb	7
C0	390
Sa	6
D_	190
Z_	37
C_	25
C0r	39500
DA_	12.127
Iso	2CC
DE_	177.034
D_b	184
DI_	153.199
SBRG	29
SDM_	165.117
D_a2	178
KBRG	3111
yobi	HR32928J

D_a1	180
mass	2.64
TC-RA	390.5
r min.	2 mm
Weight	2,64 Kg
TC-DA1	12.494
TC-DA2	11.76
TC-SLR	23
Da min	178 mm
LangID	1
ALPHA_	13.5
Db min.	184 mm
Oil rpm	2200
db max.	150 mm
Da max.	180 mm
ra max.	2 mm
hidYobi	HR32928J
da min.	152 mm
T-ALP21	27
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	1700
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	1
inner ra	2
outer rb	1.5
TC-BET22	50

Size (mm)	140x190x32
Width (mm)	32
Prod_Type3	TRBSR_MD_A
Bearing number	HR32928J
Bore Diameter (mm)	140
Outer Diameter (mm)	190
Calculation factor (e)	0,36
Calculation factor (Y0)	0,92
(Oil) Lubrication Speed	2200 r/min
(Grease) Lubrication Speed	1700 r/min
Basic dynamic load rating (C)	206 kN
Basic static load rating (C0)	390 kN