


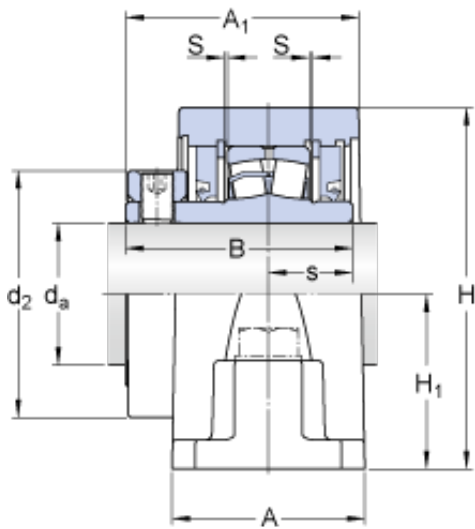

Bearing No. SYR 2-3

S	0.794 mm
A	58.738 mm
s	25.4 mm
L	212.725 mm
H	117.872 mm
B	73.025 mm
Noun	Bearing
Bore	2 Inch 50.8 Millimeter
Seals	Garter Spring
UNSPSC	31171511
J max.	174.625 mm
J min.	150.813 mm
series:	SYR
Category	Pillow Block
J - max.	174.625 mm
J - min.	150.812 mm
mounting:	Two-Bolt Base
Size (mm)	50.8x73.819x58.738
Inventory	0.0
bore type:	Round
Width (mm)	58,738
duty type:	Standard Duty
seal type:	Contact/Lip
base width:	58.7 mm
Weight / LBS	9.1
bearing type:	Spherical Roller
da	50.8 mm
Inch - Metric	Inch
d2	73.819 mm
A1	77.788 mm

H ₁	57.15 mm
H ₂	34.925 mm
Housing Style	2 Bolt Pillow Block
H ₁	57.15 mm
Product Group	M06288
d _a	50.8 mm
d ₂	73.819 mm
A ₁	77.787 mm
H ₂	34.925 mm
overall width:	3-1/8 in
bore diameter:	2.0000 in
Bearing number	SYR 2-3
Keyword String	Pillow Block
Limiting speed	1450 r/min
Mounting Bolts	5/8 Inch
Other Features	Double Row Heavy Duty Open End With Set Screw
Relubricatable	Yes
overall height:	4.5625 in
Mounting Method	Concentric Collar
Rolling Element	Spherical Roller Bearing
finish/coating:	Uncoated
expansion type:	Expansion Bearing (Floating)
locking device:	Set Screw
overall length:	8.1250 in
Manufacturer URL	http://www.skf.com
Housing Material	Cast Iron
Length Thru Bore	2.875 Inch 73.02 Millimeter
Long Description	2 Bolt Pillow Block; 2" Bore; 2-1/4" Base to Center Height;

	Concentric Collar Mount; Spherical Roller Bearing; 5-15/16" Minimum Bolt Spacing; 6-9/16" Bolt Spacing Maximum; Relubric
housing material:	Cast Iron
Manufacturer Name	SKF
lubrication type:	Lubrication Fitting
Mass bearing unit	4.13 kg
Weight / Kilogram	4.389
Bore Diameter (mm)	50,8
Insert Part Number	22210
Outer Diameter (mm)	73,819
Minimum Buy Quantity	N/A
Bolt Spacing Minimum	5.938 Inch 150.825Millimeter
replacement bearing:	22210
Bolt Spacing Maximum	6.563 Inch 166.7Millimeter
housing construction:	Solid Pillow Block
Base to Center Height	2.25 Inch 57.15 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.80
Number of Mounting Holes	2
base to bore centerline:	2.2500 in
Manufacturer Item Number	SYR 2-3
Expansion / Non- expansion	Expansion
Attachment bolt diameter G	15.875 mm
Basic dynamic load rating C	84.5 kN

radial static load capacity:	100 kN
Actual Bolt Center to Center	0 Inch 0Millimeter
radial dynamic load capacity:	84.5 kN
bolt center-to-center length:	6-1/4 in
Basic dynamic load rating - C	84.5 kN
Nominal Bolt Center to Center	6.3 Inch 160 Millimeter