


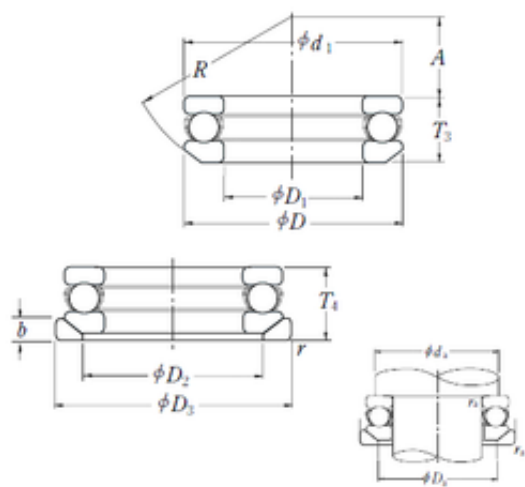

Bearing No. 53338XU

C	550
D	320 mm
R	250 mm
A	104 mm
T	121 mm
b	33 mm
d	190 mm
r	4
A_	104
D_	320
Z_	14
da	266
T3	111
C0	1960
T4	121
ra	3
B_	121
R_	250
D2	255 mm
D3	330 mm
D1	195 mm
d1	315 mm
D_2	255
D_3	330
SRE	25.7
D_1	195
SRI	25.7
DA_	47.625
D_a	244
SREX	0.16

SRIN	0
SREN	0
mass	44.7
yobi	53338XU
SDM_	255
SRIX	0.16
KBRG	513
r min.	4 mm
LangID	1
Weight	44,7 Kg
ra max.	3 mm
GRS rpm	500
Oil rpm	750
da min.	266 mm
Da max.	244 mm
hidYobi	53338XU
hidTable	ecat_NSSDTB
Size (mm)	190x320x121
Prod_Type3	TB_SD_WASW
Width (mm)	121
Bearing number	53338XU
Bore Diameter (mm)	190
Outer Diameter (mm)	320
(Grease) Lubrication Speed	500 r/min
Basic static load rating (C0)	1960 kN
Basic dynamic load rating (C)	550 kN