


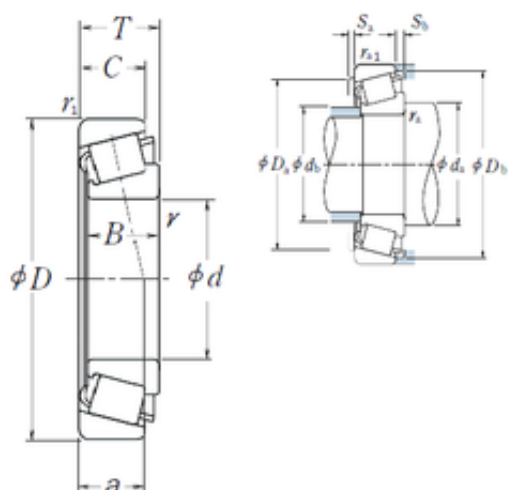

Bearing No. HR32306CJ

D	72 mm
d	30 mm
T	28,75 mm
B	27 mm
C	23 mm
a	22 mm
e	0.55
Cr	7750
Y0	0.6
db	36
da	43
Y1	1.1
B_	27
Sb	5.5
C0	86.5
Sa	3
D_	72
Z_	14
C_	23
C0r	8800
DA_	9.742
Iso	5FD
DE_	58.89
D_b	68
DI_	40.038
SBRG	23
SDM_	49.464
D_a2	54
KBRG	3111
yobi	HR32306CJ

D_a1	63
mass	0.583
TC-RA	95.868
r min.	1,5 mm
Weight	0,583 Kg
TC-DA1	10.868
TC-DA2	8.616
TC-SLR	20
Da min	54 mm
LangID	1
ALPHA_	20
Db min.	68 mm
Oil rpm	7500
db max.	36 mm
Da max.	63 mm
ra max.	1,5 mm
hidYobi	HR32306CJ
da min.	43 mm
T-ALP21	40
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	5600
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	6
inner ra	1.5
outer rb	1.5
TC-BET22	30

Size (mm)	30x72x28.75
Width (mm)	28,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR32306CJ
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Calculation factor (e)	0,55
Calculation factor (Y0)	0,6
(Oil) Lubrication Speed	7500 r/min
(Grease) Lubrication Speed	5600 r/min
Basic dynamic load rating (C)	76 kN
Basic static load rating (C0)	86,5 kN