


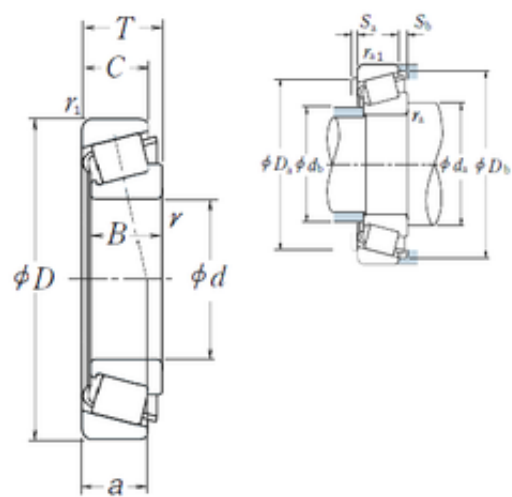

Bearing No. HR32306J

D	72 mm
d	30 mm
T	28,75 mm
B	27 mm
C	23 mm
a	18 mm
e	0.32
Cr	8150
Y0	1.1
db	38
da	43
Y1	1.9
B_	27
Sb	5.5
C0	88.5
Sa	3
D_	72
Z_	14
C_	23
C0r	9000
DA_	10.303
Iso	2FD
DE_	60.597
D_b	66
DI_	40.332
SBRG	23
SDM_	50.465
D_a2	59
KBRG	3111
yobi	HR32306J

D_a1	63
mass	0.57
TC-RA	157.066
r min.	1,5 mm
Weight	0,57 Kg
TC-DA1	10.962
TC-DA2	9.643
TC-SLR	19
Da min	59 mm
LangID	1
ALPHA_	11.859
Db min.	66 mm
Oil rpm	7500
db max.	38 mm
Da max.	63 mm
ra max.	1,5 mm
hidYobi	HR32306J
da min.	43 mm
T-ALP21	23
rb max.	1,5 mm
T-ALP22	43
T-ALP23	10
GRS rpm	5600
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	30x72x28.75
Width (mm)	28,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR32306J
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Calculation factor (e)	0,32
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	7500 r/min
(Grease) Lubrication Speed	5600 r/min
Basic dynamic load rating (C)	80 kN
Basic static load rating (C0)	88,5 kN