


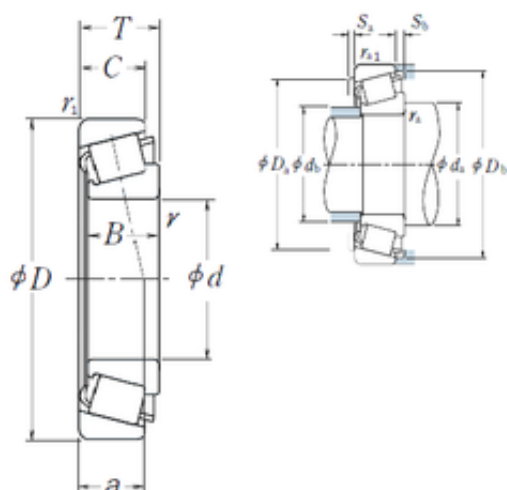

Bearing No. HR32307J

D	80 mm
d	35 mm
T	32,75 mm
B	31 mm
C	25 mm
a	20,7 mm
e	0.32
Cr	10100
Y0	1.1
db	43
da	49
Y1	1.9
B_	31
Sb	7.5
C0	111
Sa	3
D_	80
Z_	14
C_	25
C0r	11300
DA_	11.634
Iso	2FE
DE_	68.079
D_b	74
DI_	45.549
SBRG	23
SDM_	56.814
D_a2	66
KBRG	3111
yobi	HR32307J

D_a1	71
mass	0.765
TC-RA	177.138
r min.	2 mm
Weight	0,765 Kg
TC-DA1	12.363
TC-DA2	10.905
TC-SLR	21
Da min	66 mm
LangID	1
ALPHA_	11.859
Db min.	74 mm
Oil rpm	6700
db max.	43 mm
Da max.	71 mm
ra max.	2 mm
hidYobi	HR32307J
da min.	49 mm
T-ALP21	23
rb max.	1,5 mm
T-ALP22	43
T-ALP23	10
GRS rpm	5000
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2
outer rb	1.5
TC-BET22	0

Size (mm)	35x80x32.75
Width (mm)	32,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR32307J
Bore Diameter (mm)	35
Outer Diameter (mm)	80
Calculation factor (e)	0,32
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	6700 r/min
(Grease) Lubrication Speed	5000 r/min
Basic dynamic load rating (C)	99 kN
Basic static load rating (C0)	111 kN