


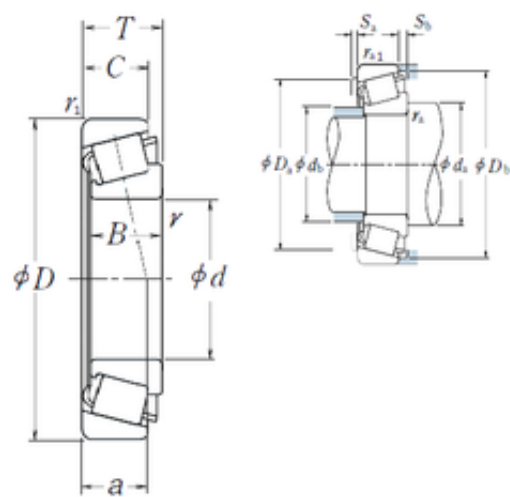

Bearing No. HR32315J

a	38,9 mm
e	0.35
d	75 mm
D	160 mm
T	58 mm
B	55 mm
C	45 mm
B_	55
da	96
Y0	0.96
C0	445
D_	160
Sb	13
Sa	4
db	91
Z_	16
Y1	1.7
C_	45
Cr	35000
DE_	138.237
Iso	2GD
DI_	96.101
C0r	45500
DA_	21.564
D_b	149
D_a2	134
SBRG	23
SDM_	117.169
D_a1	148
yobi	HR32315J

KBRG	3111
mass	5.31
TC-RA	328.115
r min.	3 mm
LangID	1
TC-DA2	20.227
Da min	134 mm
TC-SLR	38.5
ALPHA_	12.953
TC-DA1	22.901
Weight	5,31 Kg
T-ALP22	54
da min.	96 mm
r1 min.	2,5 mm
T-ALP21	25
db max.	91 mm
hidYobi	HR32315J
rb max.	2 mm
T-ALP23	20
Da max.	148 mm
Oil rpm	3200
GRS rpm	2400
ra max.	2,5 mm
inner r	3
Db min.	149 mm
outer r	2.5
inner ra	2.5
hidTable	ecat_NSTPRM
outer rb	2
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	75x160x58
Prod_Type3	TRBSR_MD_A
Width (mm)	58
Product Group	B04334
Bearing number	HR32315J
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	75
Outer Diameter (mm)	160
Minimum Buy Quantity	N/A
Calculation factor (e)	0,35
(Oil) Lubrication Speed	3200 r/min
Calculation factor (Y0)	0,96
(Grease) Lubrication Speed	2400 r/min
Basic dynamic load rating (C)	340 kN
Basic static load rating (C0)	445 kN