


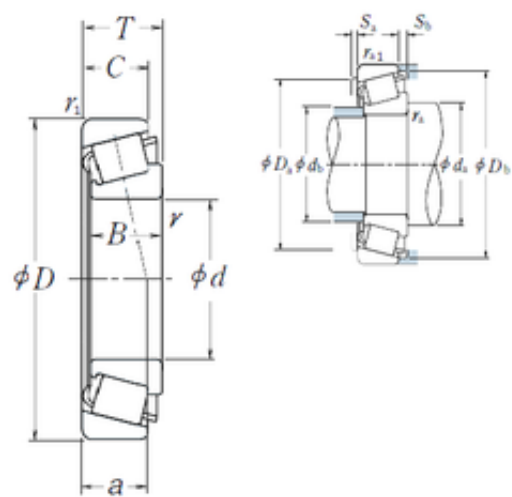

Bearing No. HR32316J

D	170 mm
d	80 mm
T	61,5 mm
B	58 mm
C	48 mm
a	41,3 mm
e	0.35
Cr	39000
Y0	0.96
db	98
da	101
Y1	1.7
B_	58
Sb	13.5
C0	505
Sa	4
D_	170
Z_	16
C_	48
C0r	51500
DA_	23.004
Iso	2GD
DE_	147.544
D_b	159
DI_	102.516
SBRG	23
SDM_	125.03
D_a2	143
KBRG	3111
yobi	HR32316J

D_a1	158
mass	6.35
TC-RA	350
r min.	3 mm
Weight	6,35 Kg
TC-DA1	24.427
TC-DA2	21.581
TC-SLR	41
Da min	143 mm
LangID	1
ALPHA_	12.953
Db min.	159 mm
Oil rpm	3000
db max.	98 mm
Da max.	158 mm
ra max.	2,5 mm
hidYobi	HR32316J
da min.	101 mm
T-ALP21	25
rb max.	2 mm
T-ALP22	54
T-ALP23	20
GRS rpm	2200
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2.5
outer rb	2
TC-BET22	0

Size (mm)	80x170x61.5
Width (mm)	61,5
Prod_Type3	TRBSR_MD_A
Bearing number	HR32316J
Bore Diameter (mm)	80
Outer Diameter (mm)	170
Calculation factor (e)	0,35
Calculation factor (Y0)	0,96
(Oil) Lubrication Speed	3000 r/min
(Grease) Lubrication Speed	2200 r/min
Basic dynamic load rating (C)	385 kN
Basic static load rating (C0)	505 kN