


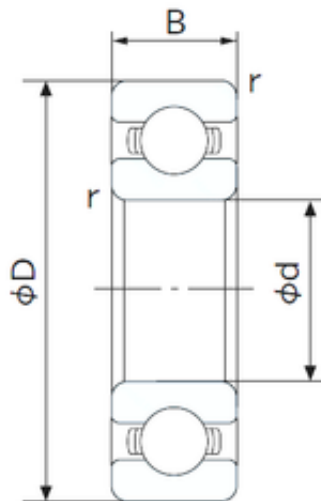

Bearing No. 6008

D	68 mm
d	40 mm
B	15 mm
C	15 mm
Width	15 mm
Weight	0.194 Kg
r min.	1 mm
da min.	45 mm
Da max.	63 mm
ra max.	1.0 mm
ra (max)	1 mm
da (min)	45 mm
Da (max)	63 mm
Bore Size	40 mm
Factor fo	15.3
Size (mm)	40x68x15
Enclosure	Open
Bore Type	Cylindrical Bore
Width (mm)	15
Configuration	Single Row
Bearing number	6008
Radial Clearance	0.006 to 0.020 mm
Outside Diameter	68 mm
Static Load Rating	11,500 N
Bore Diameter (mm)	40
Dynamic Load Rating	16,800 N
Outer Diameter (mm)	68
Limiting Speed - Oil	12,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	10,000 rpm

(Grease) Lubrication Speed	9500 r/min
Basic static load rating (C0)	11,5 kN
Basic dynamic load rating (C)	16,8 kN