


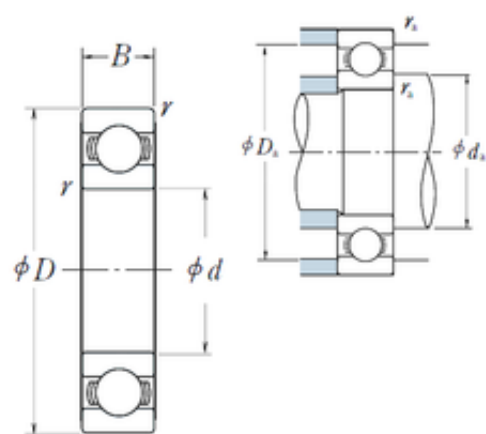

Bearing No. 6008

D	68 mm
d	40 mm
B	15 mm
C	15 mm
r	1
Z_	12
D_	68
ra	1
C0	11.5
fo	15.3
B_	15
DI_	46.562
SRI	4.11
SRE	4.11
D_a	63
DA_	7.938
DE_	62.438
SREX	0.02
SREN	-0.02
SBRG	10
KBRG	6101
mass	0.19
Bore	1.575 Inch 40 Millimeter
SRIX	0.02
SRIN	-0.02
Noun	Bearing
yobi	6008
SDM_	54.5
bomp	0

Weight	0,19 Kg
C_conv	16800
LangID	1
da min	45
r min.	1 mm
ALPHA_	0
UNSPSC	31171504
da max	47,5 mm
GRS rpm	10000
Oil rpm	12000
hidYobi	6008
ra max.	1 mm
Da max.	63 mm
da min.	45 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	40x68x15
Inventory	0.0
Enclosure	Open
Snap Ring	No
Prod_Type3	DGBB_SR_OT
Width (mm)	15
bore type:	Round
Weight / LBS	0.192
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
closure type:	Open
Bearing number	6008
Keyword String	Ball
overall width:	15 mm
bore diameter:	40 mm

Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	40MM Bore; 68MM Outside Diameter; 15MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	2.677 Inch 68 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.591 Inch 15 Millimeter
outside diameter:	68 mm
Manufacturer Name	NSK
Weight / Kilogram	0.09
Bore Diameter (mm)	40
Internal Clearance	C0-Medium
internal clearance:	Normal Clearance
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	12 000 r/min
Manufacturer Item Number	6008
manufacturer upc number:	029176012815
Internal Special Features	No
(Grease) Lubrication Speed	10 000 r/min
Basic static load rating (C0)	11,5 kN
Basic dynamic load	16,8 kN

rating (C)	
Maximum Capacity / Filling Slot	No