


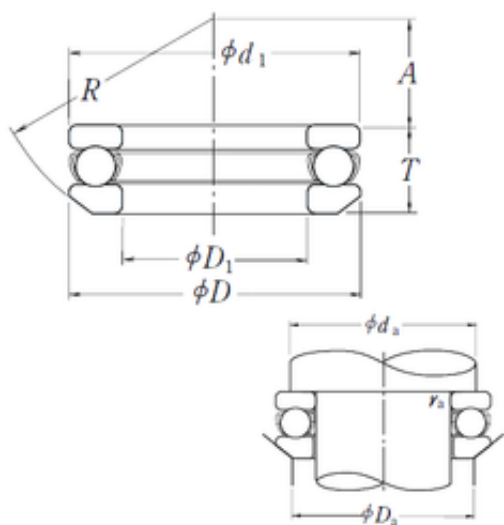

Bearing No. 53405

R	50 mm
C	56
r	1
d	25 mm
D	60 mm
T	26,4 mm
A	19 mm
R_	50
B_	26.4
ra	1
C0	89.5
da	46
Z_	9
A_	19
T3	26.4
d1	60 mm
D_	60
D1	27 mm
D_1	27
DA_	12.7
SRI	6.85
SRE	6.85
D_a	39
SREN	0
SRIN	0
yobi	53405
SRIX	0
mass	0.353
SDM_	42.5
KBRG	5121

SREX	0.05
Noun	Bearing
Bore 1	0.984 Inch 25 Millimeter
Banded	No
UNSPSC	31171552
r min.	1 mm
LangID	1
Height	1.039 Inch 26.4 Millimeter
Weight	0,353 Kg
Bore 2	1.063 Inch 27 Millimeter
Oil rpm	4000
GRS rpm	2600
hidYobi	53405
ra max.	1 mm
Da max.	39 mm
da min.	46 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	25x60x26.4
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	26,4
Weight / LBS	0.77823
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53405
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	25MM Bore 1; 27MM Bore 2; 60MM Outside Diameter; 26.4MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	2.362 Inch 60 Millimeter
Weight / Kilogram	0.422
Manufacturer Name	NSK
Bore Diameter (mm)	25
Outer Diameter (mm)	60
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	2600 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	89,5 kN
Basic dynamic load rating (C)	56 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter