


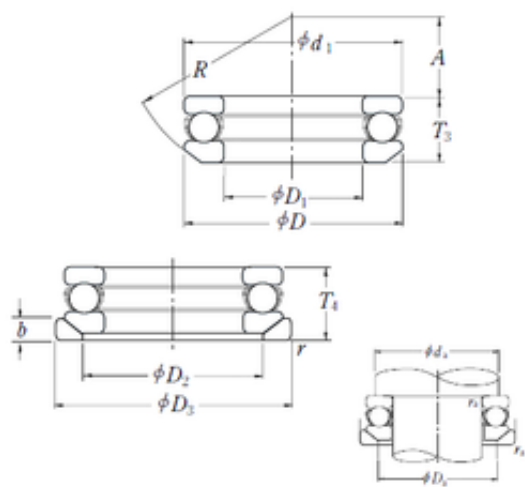

Bearing No. 53405U

C	56
D	60 mm
R	50 mm
A	19 mm
T	29 mm
b	8 mm
d	25 mm
r	1
A_	19
D_	60
Z_	9
da	46
T3	26.4
C0	89.5
T4	29
ra	1
B_	29
R_	50
D2	42 mm
D3	62 mm
D1	27 mm
d1	60 mm
D_2	42
D_3	62
SRE	6.85
D_1	27
SRI	6.85
DA_	12.7
D_a	39
SREX	0.05

SRIN	0
SREN	0
mass	0.426
yobi	53405U
SDM_	42.5
SRIX	0
KBRG	5131
r min.	1 mm
LangID	1
Weight	0,426 Kg
ra max.	1 mm
GRS rpm	2600
Oil rpm	4000
da min.	46 mm
Da max.	39 mm
hidYobi	53405U
hidTable	ecat_NSSDTB
Size (mm)	25x60x29
Prod_Type3	TB_SD_WASW
Width (mm)	29
Bearing number	53405U
Bore Diameter (mm)	25
Outer Diameter (mm)	60
(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	89,5 kN
Basic dynamic load rating (C)	56 kN