


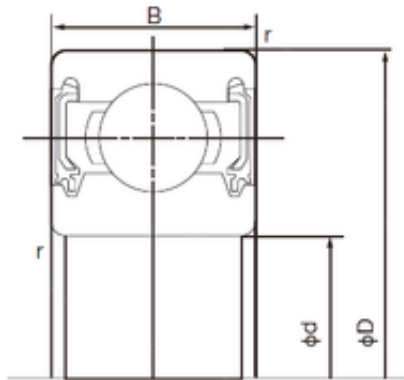

**Bearing No. 6008-2NKE9**

|                               |                   |
|-------------------------------|-------------------|
| D                             | 68 mm             |
| d                             | 40 mm             |
| B                             | 15 mm             |
| C                             | 15 mm             |
| Width                         | 15 mm             |
| Weight                        | 0.194 kg          |
| r min.                        | 1.0 mm            |
| ra (max)                      | 1 mm              |
| Da (max)                      | 63 mm             |
| da (min)                      | 45 mm             |
| Factor fo                     | 15.3              |
| Bore Size                     | 40 mm             |
| Enclosure                     | Double Seal       |
| Size (mm)                     | 40x68x15          |
| Bore Type                     | Cylindrical Bore  |
| Width (mm)                    | 15                |
| Configuration                 | Single Row        |
| Bearing number                | 6008-2NKE9        |
| Outside Diameter              | 68 mm             |
| Radial Clearance              | 0.006 to 0.020 mm |
| Static Load Rating            | 11,500 N          |
| Bore Diameter (mm)            | 40                |
| Dynamic Load Rating           | 16,800 N          |
| Outer Diameter (mm)           | 68                |
| Limiting Speed - Grease       | 10,000 rpm        |
| Basic static load rating (C0) | 11,5 kN           |
| Basic dynamic load rating (C) | 16,8 kN           |