


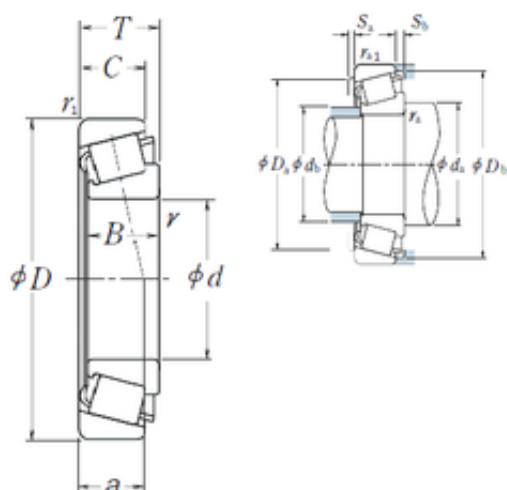

Bearing No. HR32207C

D	72 mm
d	35 mm
T	24,25 mm
B	23 mm
C	18 mm
a	20,6 mm
e	0.55
Cr	6200
Y0	0.6
db	42
da	46
Y1	1.1
B_	23
Sb	6
C0	71.5
Sa	3
D_	72
Z_	17
C_	18
C0r	7300
DA_	8.613
Iso	-
DE_	61.052
D_b	68.5
DI_	44.866
SBRG	22
SDM_	52.959
D_a2	58
KBRG	3111
yobi	HR32207C

D_a1	63
mass	0.442
TC-RA	97.215
r min.	1,5 mm
Weight	0,442 Kg
TC-DA1	9.327
TC-DA2	7.898
TC-SLR	15
Da min	58 mm
LangID	1
ALPHA_	20
Db min.	68,5 mm
Oil rpm	7100
db max.	42 mm
Da max.	63 mm
ra max.	1,5 mm
hidYobi	HR32207C
da min.	46 mm
T-ALP21	40
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	5000
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	5
inner ra	1.5
outer rb	1.5
TC-BET22	30

Size (mm)	35x72x24.25
Width (mm)	24,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR32207C
Bore Diameter (mm)	35
Outer Diameter (mm)	72
Calculation factor (e)	0,55
Calculation factor (Y0)	0,6
(Oil) Lubrication Speed	7100 r/min
(Grease) Lubrication Speed	5000 r/min
Basic dynamic load rating (C)	60,5 kN
Basic static load rating (C0)	71,5 kN