


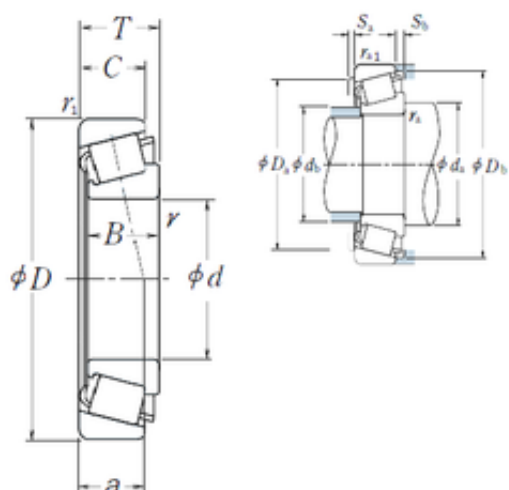

Bearing No. HR32207J

D	72 mm
d	35 mm
T	24,25 mm
B	23 mm
C	19 mm
a	17,9 mm
e	0.38
Cr	7150
Y0	0.88
db	42
da	46
Y1	1.6
B_	23
Sb	5
C0	83.5
Sa	3
D_	72
Z_	17
C_	19
C0r	8550
DA_	8.945
Iso	3DC
DE_	61.837
D_b	67.5
DI_	44.625
SBRG	22
SDM_	53.231
D_a2	61
KBRG	3111
yobi	HR32207J

D_a1	63
mass	0.456
TC-RA	136.372
r min.	1,5 mm
Weight	0,456 Kg
TC-DA1	9.518
TC-DA2	8.372
TC-SLR	16.5
Da min	61 mm
LangID	1
ALPHA_	14.036
Db min.	67,5 mm
Oil rpm	7100
db max.	42 mm
Da max.	63 mm
ra max.	1,5 mm
hidYobi	HR32207J
da min.	46 mm
T-ALP21	28
rb max.	1,5 mm
T-ALP22	4
T-ALP23	20
GRS rpm	5300
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	35x72x24.25
Width (mm)	24,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR32207J
Bore Diameter (mm)	35
Outer Diameter (mm)	72
Calculation factor (e)	0,38
Calculation factor (Y0)	0,88
(Oil) Lubrication Speed	7100 r/min
(Grease) Lubrication Speed	5300 r/min
Basic dynamic load rating (C)	70,5 kN
Basic static load rating (C0)	83,5 kN