


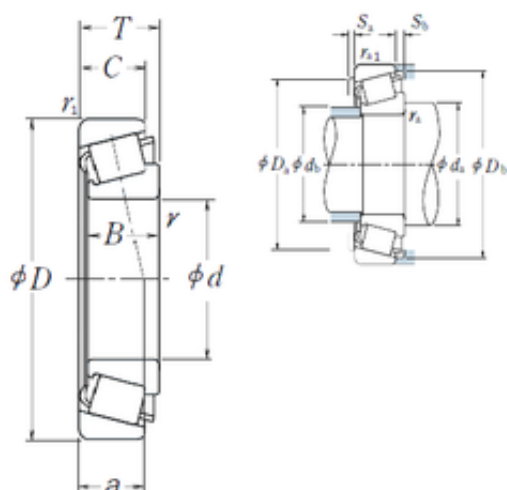

Bearing No. HR32208CJ

|      |           |
|------|-----------|
| D    | 80 mm     |
| d    | 40 mm     |
| T    | 24,75 mm  |
| B    | 23 mm     |
| C    | 19 mm     |
| a    | 21,9 mm   |
| e    | 0.55      |
| Cr   | 7550      |
| Y0   | 0.6       |
| db   | 47        |
| da   | 51        |
| Y1   | 1.1       |
| B_   | 23        |
| Sb   | 5.5       |
| C0   | 90.5      |
| Sa   | 3         |
| D_   | 80        |
| Z_   | 18        |
| C_   | 19        |
| C0r  | 9200      |
| DA_  | 9.302     |
| Iso  | 5DC       |
| DE_  | 68.354    |
| D_b  | 76        |
| DI_  | 50.567    |
| SBRG | 22        |
| SDM_ | 59.461    |
| D_a2 | 65        |
| KBRG | 3111      |
| yobi | HR32208CJ |
|      |           |

|          |             |
|----------|-------------|
| D_a1     | 71          |
| mass     | 0.558       |
| TC-RA    | 108.167     |
| r min.   | 1,5 mm      |
| Weight   | 0,558 Kg    |
| TC-DA1   | 10.064      |
| TC-DA2   | 8.539       |
| TC-SLR   | 16.5        |
| Da min   | 65 mm       |
| LangID   | 1           |
| ALPHA_   | 20          |
| Db min.  | 76 mm       |
| Oil rpm  | 6300        |
| db max.  | 47 mm       |
| Da max.  | 71 mm       |
| ra max.  | 1,5 mm      |
| hidYobi  | HR32208CJ   |
| da min.  | 51 mm       |
| T-ALP21  | 40          |
| rb max.  | 1,5 mm      |
| T-ALP22  | 0           |
| T-ALP23  | 0           |
| GRS rpm  | 4500        |
| inner r  | 1.5         |
| outer r  | 1.5         |
| r1 min.  | 1,5 mm      |
| hidTable | ecat_NSTPRM |
| TC-BET23 | 0           |
| TC-BET21 | 5           |
| inner ra | 1.5         |
| outer rb | 1.5         |
| TC-BET22 | 20          |
|          |             |

|                               |             |
|-------------------------------|-------------|
| Size (mm)                     | 40x80x24.75 |
| Width (mm)                    | 24,75       |
| Prod_Type3                    | TRBSR_MD_A  |
| Bearing number                | HR32208CJ   |
| Bore Diameter (mm)            | 40          |
| Outer Diameter (mm)           | 80          |
| Calculation factor (e)        | 0,55        |
| Calculation factor (Y0)       | 0,6         |
| (Oil) Lubrication Speed       | 6300 r/min  |
| (Grease) Lubrication Speed    | 4500 r/min  |
| Basic dynamic load rating (C) | 74 kN       |
| Basic static load rating (C0) | 90,5 kN     |