


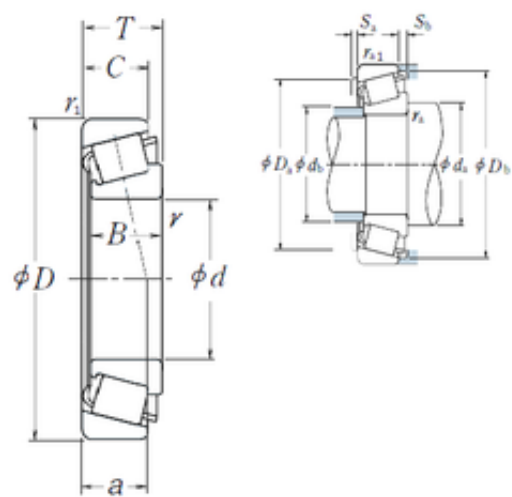

Bearing No. HR32208J

D	80 mm
d	40 mm
T	24,75 mm
B	23 mm
C	19 mm
a	18,9 mm
e	0.38
Cr	7900
Y0	0.88
db	48
da	51
Y1	1.6
B_	23
Sb	5.5
C0	90.5
Sa	3
D_	80
Z_	17
C_	19
C0r	9200
DA_	10.045
Iso	3DC
DE_	69.465
D_b	75
DI_	50.117
SBRG	22
SDM_	59.791
D_a2	68
KBRG	3111
yobi	HR32208J

D_a1	71
mass	0.548
TC-RA	151.875
r min.	1,5 mm
Weight	0,548 Kg
TC-DA1	10.6
TC-DA2	9.49
TC-SLR	16
Da min	68 mm
LangID	1
ALPHA_	14.036
Db min.	75 mm
Oil rpm	6300
db max.	48 mm
Da max.	71 mm
ra max.	1,5 mm
hidYobi	HR32208J
da min.	51 mm
T-ALP21	28
rb max.	1,5 mm
T-ALP22	4
T-ALP23	20
GRS rpm	4800
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	40x80x24.75
Width (mm)	24,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR32208J
Bore Diameter (mm)	40
Outer Diameter (mm)	80
Calculation factor (e)	0,38
Calculation factor (Y0)	0,88
(Oil) Lubrication Speed	6300 r/min
(Grease) Lubrication Speed	4800 r/min
Basic dynamic load rating (C)	77 kN
Basic static load rating (C0)	90,5 kN