


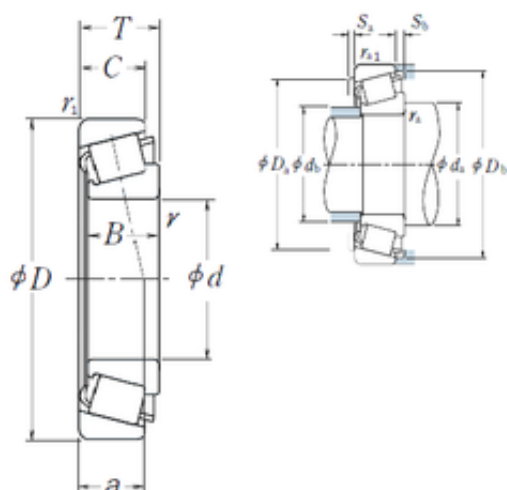

Bearing No. HR32210CJ

D	90 mm
d	50 mm
T	24,75 mm
B	23 mm
C	18 mm
a	24,6 mm
e	0.59
Cr	7900
Y0	0.56
db	58
da	61
Y1	1
B_	23
Sb	6.5
C0	102
Sa	3
D_	90
Z_	20
C_	18
C0r	10400
DA_	9.195
Iso	5DC
DE_	79.199
D_b	87
DI_	61.832
SBRG	22
SDM_	70.516
D_a2	76
KBRG	3111
yobi	HR32210CJ

D_a1	81
mass	0.655
TC-RA	117.236
r min.	1,5 mm
Weight	0,655 Kg
TC-DA1	9.886
TC-DA2	8.503
TC-SLR	16.5
Da min	76 mm
LangID	1
ALPHA_	21.333
Db min.	87 mm
Oil rpm	5300
db max.	58 mm
Da max.	81 mm
ra max.	1,5 mm
hidYobi	HR32210CJ
da min.	61 mm
T-ALP21	42
rb max.	1,5 mm
T-ALP22	40
T-ALP23	0
GRS rpm	3800
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	1.5
outer rb	1.5
TC-BET22	50

Size (mm)	50x90x24.75
Width (mm)	24,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR32210CJ
Bore Diameter (mm)	50
Outer Diameter (mm)	90
Calculation factor (e)	0,59
Calculation factor (Y0)	0,56
(Oil) Lubrication Speed	5300 r/min
(Grease) Lubrication Speed	3800 r/min
Basic dynamic load rating (C)	77,5 kN
Basic static load rating (C0)	102 kN