


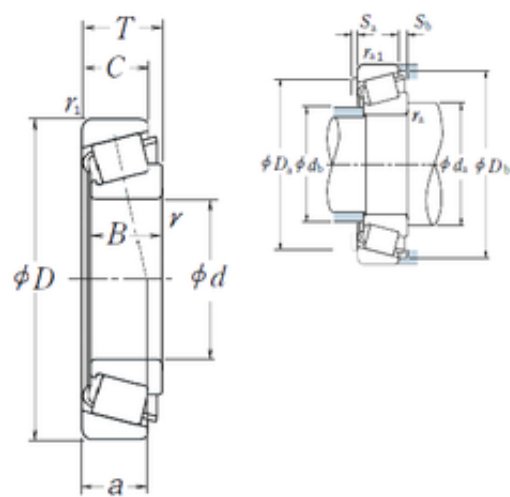

Bearing No. HR32213J

a	27,1 mm
e	0.41
d	65 mm
D	120 mm
T	32,75 mm
B	31 mm
C	27 mm
B_	31
da	77
Y0	0.81
C0	202
D_	120
Sb	5.5
Sa	4
db	75
Z_	19
Y1	1.5
C_	27
Cr	16000
DE_	106.774
Iso	3EC
DI_	78.601
C0r	20600
DA_	14.245
D_b	115
D_a2	104
SBRG	22
SDM_	92.688
D_a1	111
yobi	HR32213J

KBRG	3111
mass	1.55
TC-RA	215.036
r min.	2 mm
LangID	1
TC-DA2	13.482
Da min	104 mm
TC-SLR	22
ALPHA_	15.109
TC-DA1	15.008
Weight	1,55 Kg
T-ALP22	13
da min.	77 mm
r1 min.	1,5 mm
T-ALP21	30
db max.	75 mm
hidYobi	HR32213J
rb max.	1,5 mm
T-ALP23	8
Da max.	111 mm
Oil rpm	4000
GRS rpm	3000
ra max.	2 mm
inner r	2
Db min.	115 mm
outer r	1.5
inner ra	2
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	65x120x32.75
Prod_Type3	TRBSR_MD_A
Width (mm)	32,75
Product Group	B04334
Bearing number	HR32213J
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	65
Outer Diameter (mm)	120
Minimum Buy Quantity	N/A
Calculation factor (e)	0,41
(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,81
(Grease) Lubrication Speed	3000 r/min
Basic dynamic load rating (C)	157 kN
Basic static load rating (C0)	202 kN